

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-135-23,699-0000

LEASE NAME Walker

WELL NUMBER B1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

1980 Ft. from S Section Line

1650 Ft. from E Section Line

SEC. 14 TWP. 16S RGE. 26 (E/W)

COUNTY Ness

LEASE OPERATOR Thomas C. Lutz

ADDRESS P. O. Drawer 940, Fayetteville, AR 72702

PHONE# (501) -443-5430 OPERATORS LICENSE NO. 4689

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 10/8/92

Plugging Commenced 10/8/92

Plugging Completed 10/8/92

The plugging proposal was approved on 10-8-92 (date)

by Steve Pfeifer (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4600'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled out |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 257' | -0- |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.

Mud laden fluid 4600'-2020' 50 sks cement @ 280'

50 sks cement @ 2020' 10 sks cement @ 40'

80 sks cement @ 1225' 15 sks in rathole

50 sks cement @ 600' 10 sks in mousehole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]

(Address) Kyle B. Branum

Box 506, Russell, KS

SUBSCRIBED AND SWORN TO before me this 9th day of October

Glenda R. Tiffin
Glenda R. Tiffin, Notary Public

My Commission Expires: 2-6-96
GLENDA R. TIFFIN
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-96

RECEIVED
STATE CORPORATION COMMISSION
OCT 13 1992
CONSERVATION DIVISION
Wichita, Kansas

Form CP-4
Revised 07-87

15135-23699-0000

EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Thomas C. Lutz
P.O. Drawer 940
Fayetteville, AR 72702

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Walker 'B' WELL #1

LOCATION: E/2 NW SE
Section 14-16S-26W
Ness County, Kansas

LOGGERS TOTAL DEPTH: 4600'

ROTARY TOTAL DEPTH: 4600'

COMMENCED: 10-1-92

CASING: 8-5/8" @ 257' w/150 sks cement

ELEVATION: 2575'

COMPLETED: 10-8-92

STATUS: Dry Hole

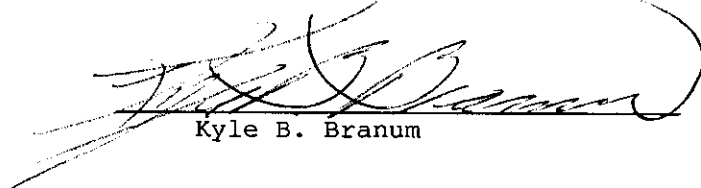
DEPTHS & FORMATIONS

(All measurements from K.B.)

| | | | |
|--------------|-------|-------------|-------|
| Sand & Shale | 175' | Marmaton | 4210' |
| Cedar Hill | 1462' | Pawnee | 4285' |
| Shale | 1635' | Fort Scott | 4365' |
| Anhydrite | 1992' | Mississippi | 4455' |
| Shale | 2020' | R.T.D. | 4600' |
| Lime & Shale | 3590' | L.T.D. | 4600' |
| Shale & Lime | 3785' | | |

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.


Kyle B. Branum

Subscribed and sworn to before me on October 9, 1992.

My commission expires: February 10, 1996.



Katherine Bray
Katherine Bray, Notary Public

RECEIVED
STATE CORPORATION COMMISSION

OCT 15 1992
10-15-92
CONSERVATION DIVISION
Wichita, Kansas