

ORIGINAL

SIDE ONE

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
WELL COMPLETION FORM
ACO-1 WELL HISTORY
DESCRIPTION OF WELL AND LEASE

Operator: License # 5030

Name: Vess Oil Corporation

Address 8100 E. 22nd North Bldg. 300

City/State/Zip Wichita, KS. 67226

Purchaser: -----

Operator Contact Person: Bill Horigan

Phone (316) 682-1537

Contractor: Name: L. D. Drilling, Inc.

License: 6039

Wellsite Geologist: Kim Shoemaker

Designate Type of Completion

New Well Re-Entry Workover

Oil SWD Temp. Abd.
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply, etc.)

If **OWNO**: old well info as follows:

Operator: -----

Well Name: -----

Comp. Date ----- Old Total Depth -----

Drilling Method:

Mud Rotary Air Rotary Cable

11-06-90 11-13-90
Spud Date Date Reached TD Completion Date

API NO. 15- 135-23.518 - (888)

County Ness

110'W East
SE NE SE Sec. 10 Twp. 16S Rge. 26 West

1650 Ft. North from Southeast Corner of Section

440 Ft. West from Southeast Corner of Section
(NOTE: Locate well in section plat below.)


Lease Name BAKER "BD" Well # 1

Field Name Unice NE

Producing Formation -----

Elevation: Ground 2611' KB 2616'

Total Depth 4551' PBTD -----

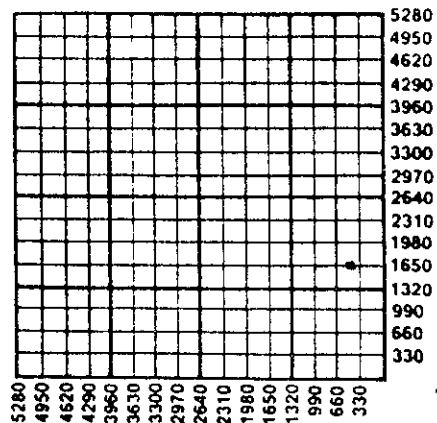

Amount of Surface Pipe Set and Cemented at 256' Feet

Multiple Stage Cementing Collar Used? Yes No

If yes, show depth set ----- Feet

If Alternate II completion, cement circulated from -----

feet depth to ----- w/ ----- sx cmt.

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells. Any recompletion, workover or conversion of a well requires filing of ACO-2 within 120 days from commencement date of such work.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature WR Horigan

Title Operations Manager Date 12/3/90

Subscribed and sworn to before me this 3rd day of December 19 90.

Notary Public Paula K. Driske

Date Commission Expires June 27, 1994

K.C.C. OFFICE USE ONLY
F Letter of Confidentiality Attached
 Wireline Log Received
 Drillers Time Log Received
Distribution
 SWD/Rep NGPA
 Plug Other
(Specify)
KCC
KGS
DEC 5 1990
12-5-90
COMMISSION DIVISION
WICHITA



ORIGINAL

DRILLER'S WELL LOG

COMMENCED: 11-06-90
COMPLETED: 11-13-90

VESS OIL CORPORATION
BAKER #1
110' W SE NE SE Sec. 10-16S-26W
Ness County, Kansas

0 - 256 Surface
256 - 565 Clay & Shale
565 - 1875 Clay-shale & sand streaks
1875 - 2031 Shale W/sand streaks
2031 - 2074 Anhy
2074 - 2570 Shale W/lime
2570 - 2800 Shale
2800 - 4115 Lime & Shale
4115 - 4551 Lime
4551 R.T.D

ELEVATION: 2611 GL 2616 KB

FORMATION DATA:

Anhy 2039 (+577) 2074(+542)
Heebner 3883 (-1267)
Lansing 3923 (-1307)
Stark 4170 (-1554)
B K/C 4227 (-1611)
Fort Scott 4437 (-1821)
Cherokee 4468 (-1852)
Mississippi 4535 (-1919)
RTD 4551 (-1935)

SURFACE CASING:

8 5/8" set @ 256' W/160 sx. 60/40 Pozmix,
2% Gel, 3% CC


AFFIDAVIT

STATE OF KANSAS)
COUNTY OF BARTON)^{ss}

GREG DAVIDSON of lawful age, does swear and state that the facts and statements
herein are true and correct to the best of his knowledge.

Greg Davidson
Greg Davidson

Subscribed and sworn to before me this 26th day of November, 1990.



Bessie M. DeWerff
Notary Public: Bessie M. DeWerff

My Commission Expires: 5-20-93

COPY

Attachment to ACO-1
Baker 'BD' #1
110' W SE NE SE
Section 10-16-26W
Ness County, Kansas

ORIGINAL

DST #1 4538 - 4548 Zone: Mississippi
Times: 30-45-45-60
Blow: 1st open - ½" blow, increased to 1½"
 2nd open - ½" blow, increased to 1"
Rec: 20' CO, 40' HOCM
IFP: 20 - 20 FFP: 31 - 31
ISIP: 1195 FSIP: 1174

DST #2 4541 - 4551 Zone: Mississippi
Times: 30-45-45-60
Blow: 1st open - built to 4-4½"
Rec: 30' CO, 90' VSOCMW (1% oil, 52% water)
IFP: 41 - 41 FFP: 62-72
ISIP: 1174 FSIP: 1122

SAMPLE TOPS

Anhydrite, B/Anh.	2034-2074
Heebner	3883(-1267)
LKC	3923(-1307)
Stark	4170(-1554)
BKC	4227(-1611)
Ft. Scott	4437(-1821)
Cherokee	4468(-1852)
Mississippi	4535(-1919)
RTD	4551(-1935)

RECORDED
STATE OF KANSAS DEPARTMENT OF REVENUE

DEC 5 1960

COMPTROLLER GENERAL
Wichita, Kansas

Phone 915-83-2627, Russell, Kansas
 Phone 316-793-5861, Great Bend, Kansas

ORIGINAL

Phone Plainville 913-434-2812
 Phone Ness City 913-798-3843

ALLIED CEMENTING CO., INC. No. 7162

Home Office P. O. Box 31 Russell, Kansas 67665

New

Date <i>11-6-90</i>	Sec. <i>10</i>	Twp. <i>16</i>	Range <i>26</i>	Called Out <i>2:00 PM</i>	On Location <i>3:30 PM</i>	Job Start <i>5:00 PM</i>	Finish <i>5:20 PM</i>
Lease <i>Baker 'BD'</i>		Well No. <i>1</i>	Location <i>Utica Wide 2 1/2 N W into</i>		County <i>Ness</i>	State <i>Mo.</i>	
Contractor <i>L.D. Drilling</i>				Owner <i>Vess</i>			
Type Job <i>Surface</i>				To Allied Cementing Co., Inc. You are hereby requested to rent cementing equipment and furnish cement and helper to assist owner or contractor to do work as listed.			
Hole Size <i>12 1/4</i>	T.D. <i>256'</i>			Charge To <i>Vess Oil Corporation</i>			
Csg. <i>8 5/8</i>	Depth <i>257'</i>			Street <i>8100 E. 22nd St. N Bldg #300</i>			
Tbg. Size	Depth			City <i>Wichita</i> State <i>Ko. 67226</i>			
Drill Pipe	Depth			The above was done to satisfaction and supervision of owner agent or contractor			
Tool	Depth			Purchase Order No.			
Cement Left in Csg. <i>15'</i>	Shoe Joint			<input checked="" type="checkbox"/> <i>Don Popp</i>			
Press Max.	Minimum			CEMENT			
Meas Line <i>NO</i>	Displace <i>15.4</i>			Amount Ordered <i>160^{60/40} 2% gel 3% cc</i>			
Perf.				Consisting of			

EQUIPMENT

New

No.	Cementer	
Pumptrk # <i>158</i>	Helper	
No.	Cementer	<i>J.D. DREILING</i>
Pumptrk	Helper	<i>BILL S</i>
# <i>114</i>	Driver	<i>CHAD</i>
Bulktrk	Driver	

DEPTH of Job

Reference:	<i>Pumptrk charge</i>	<i>380.00</i>
<i>30</i>	<i>Mileage</i>	<i>60.00</i>
<i>1 8 5/8 TWP</i>		<i>42.00</i>
	Sub Total	
	Tax	
	Total	<i>482.00</i>

Remarks: *Cement did circulate*
Allied Cementing
Don Popp Drilling

Common	<i>96</i>	<i>5.25</i>	<i>504.00</i>
Poz. Mix	<i>64</i>	<i>2.25</i>	<i>144.00</i>
Gel.	<i>3</i>	<i>6.75</i>	<i>NIC</i>
Chloride	<i>5</i>	<i>21.00</i>	<i>105.00</i>
Quickset			
Handling	<i>160</i>	<i>1.00</i>	<i>160.00</i>
Mileage	<i>30</i>		<i>144.00</i>
	Sub Total		
	Total		<i>1057.00</i>
Floating Equipment			
TOTAL \$		<i>1539.00</i>	
Disc -		<i>307.80</i>	
			<i>\$1231.20</i>

Thank you.

Bid

ORIGINAL

Phone 913-483-2627, Russell, Kansas
Phone 316-793-5861, Great Bend, Kansas

Phone Plainville 913-434-2812
Phone Ness City 913-798-3843

ALLIED CEMENTING CO., INC. No. 7238

NEW

Home Office P. O. Box 31

Russell, Kansas 67665

Date	11-13-90	Sec	10	Twp.	16	Range	26W	Called Out	6:00 PM	On Location	8:30 PM	Job Start	8:45 PM	Finish	11:00 PM
Lease	Baker	Well No.	/			Location	Otica W 2 1/2 N			County	Ness	State	Ks		
Contractor	L.D. Dals.														
Type Job	Rotary Plug														
Hole Size	2 7/8		T.D.	4551'											
Csg.	Depth														
Tbg. Size	Depth														
Drill Pipe	Depth														
Tool	Depth														
Cement Left in Csg.	Shoe Joint														
Press Max.	Minimum														
Meas Line	Displace														
Perf.															

Owner
To Allied Cementing Co., Inc.
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.

Charge To *Ness O.I. Corporation*
Street *8100 E. 22nd St. N. Bldg #30*
City *Wichita* State *Ks. 67226*

The above was done to satisfaction and supervision of owner agent or contractor

EQUIPMENT

Pumptrk	No. <i>46</i>	Cementer	<i>Krus</i>
		Helper	<i>John</i>
Pumptrk	No.	Cementer	
		Helper	
Bulktrk	<i>199</i>	Driver	<i>Bob</i>
Bulktrk		Driver	

DEPTH of Job

Reference:	<i>Pump tile chg.</i>	<i>475.00</i>
	<i>30 mileage</i>	<i>60.00</i>
	<i>1 8 3/4 O.H.P.</i>	<i>20.00</i>
	Sub Total	
	Tax	
	Total	<i>555.00</i>

Remarks: *1st 5050 2060'*
2nd 8050 1200'
3rd 5050 660'
4th 4050 300'
1050 40' 1550 R.H.

Purchase Order No. *XXXXXX*

ROD DAWSON

CEMENT

Amount Ordered		
Consisting of	<i>24550 60/40 6% 50'</i>	
Common	<i>150 FLO seal</i>	
Common	<i>Common 147</i>	<i>5.25 771.75</i>
Per	<i>98</i>	<i>2.25 220.50</i>
Chloride		
Gravel	<i>15</i>	<i>6.75 101.25</i>
FLO Seal	<i>61</i>	<i>1.00 61.00</i>
Sales Tax		
Handling	<i>245</i>	<i>1.00 245.00</i>
Mileage	<i>30</i>	<i>294.00</i>
Sub Total		
Total	<i>1693.50</i>	

Flooring Equipment

Allied Cementing
By: *Krus Klipha*

Total \$ *2248.50*
Disc - *449.70*
\$ 1798.80

Thank you