


15-077-20374-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

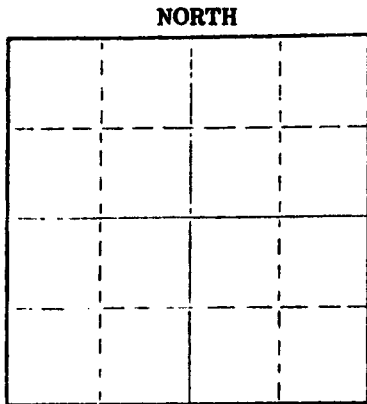

Locate well correctly on above Section Plat

Harper County, Sec. 6 Twp. 31S Rge. (E) 7 (W)
Location as "NE/CNW/SW" or footage from lines 1980' FNL & 1760' FWL
Lease Owner Texas Oil & Gas Corp.
Lease Name Washbon Well No. 1
Office Address 200 W. Douglas, Suite 450, Wichita, Ks 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 8-23-76 19
Application for plugging filed 8-23-76 19
Application for plugging approved 8-23-76 19
Plugging commenced 8-23-76 19
Plugging completed 8-23-76 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well George Russel Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4815'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	257'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole, Heavy mud from TD to 250'. @250' cement with 35 sacks cement mud to 40' 1/2# hulls. Plugged bridge. 15 sacks to base of cellar. 5 sacks in rat hole. By Allied Cement Co.

RECEIVED
STATE CORPORATION COMMISSION

08 26-1976
AUG 26 1976

Name of Plugging Contractor XPLOR DRILLING CO. (If additional description is necessary, use BACK of this sheet)
Address CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK ss.
Wayne L. Kirkman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne L. Kirkman
434 North Market, Suite 110 Wichita KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 25 day of August 19 76

My commission expires August 25, 1976

Virginia Lee Smith, Notary Public.



WELL LOG

WASHBON #1
 1980' FNL & 1760' FWL
 Section 6-31S-7W
 Harper County, Kansas

OPERATOR: TEXAS OIL AND GAS CORP. COMMENCED: 8-13-76
 CONTRACTOR: XPLOR DRILLING CO. COMPLETED: 8-23-76

CASING RECORD: Cut 261' 12 1/4" hole, Ran 6 jts. new 24# 8 5/8" set @257'.
 100 sacks light weight - 150 sacks common, 3% cal.chloride,
 2% gel. Cement did not circulate. Cement top with 1" cement
 with 150 sacks.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Shale & Sand	0	134	
Red Bed	134	455	
Shale	455	1285	
Anhydrite	1285	1292	
Lime & Shale	1292	3595	
Shale	3595	3729	
Lime & Shale	3729	4414	
Chert	4414	4470	
Lime	4470	4743	
Lime & Shale	4743	4815	
RTD	4815		

RECEIVED
 STATE CORPORATION COMMISSION

AUG 26 1976
 08-26-1976
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I certify that this is a true and correct copy of the Driller's Log of the well drilled 1980' FNL & 1760' FWL of Section 6-31S-7W, Harper County, Kansas, to the best of my knowledge and belief.

XPLOR DRILLING COMPANY

Wayne L. Kirkman
 Wayne L. Kirkman, Owner

Subscribed and sworn to before me this 25th. day of August, 1976.

MY COMMISSION EXPIRES
 August 25, 1976

Virginia Lee Smith
 Virginia Lee Smith, Notary Public

