


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

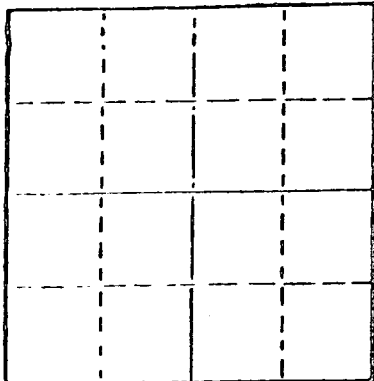

Locate well correctly on above
Section Plot

Harper County. Sec. 7 Twp. 31S Rge. 7 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
100' N SW SW NW
Lease Owner Hummon Oil Company
Lease Name Rutherford Well No. 1
Office Address 1725 Vickers KSB&T Bldg., Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole

Date Well completed October 20 1978
Application for plugging filed October 30 1978
Application for plugging approved October 25 1978
Plugging commenced October 21 1978
Plugging completed October 21 1978
Reason for abandonment of well or producing formation

Non-commercial

If a producing well is abandoned, date of last production
N/A 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. William T. Owen
Producing formation Depth to top Bottom Total Depth of Well 4815'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	269'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

1st plug 270' w/40sx.
2nd plug 40' w/12sx.
35sx. cement in rathole

RECEIVED
STATE CORPORATION COMMISSION

OCT 31 1978
10-31-1978
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Cabbert-Jones, Inc.
830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Byron E. Hummon, Jr. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

SANDRA L. MENDOZA
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY APPT. EXP.

(Signature)

1725 Vickers KSB&T Bldg., Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of October, 1978

Sandra L. Mendoza

Notary Public.

My commission expires February 13, 1982

15-077-20491-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Rutherford #1

100'N C SW-SW-NW Sec 7-31S-7W
Harper County Kansas

Commenced: 10-11-78

Completed: 10-21-78

OPERATOR: HUMMON OIL CO.

Depth		Formation	Remarks
From	To		
0	110	Sand	Ran 6 jts of 24# 8 5/8" csg set @ 269' Cemented w/ 225 sks Common 2% Gel 3% CC PD @ 9:30 a.m. 10-11-78
110	700	Redbed	
700	1370	Redbed-Shale	
1370	1592	Shale-Shells	
1592	1950	Shale	DRY & ABANDONED
1950	2170	Lime	
2170	2415	Shale-Lime	
2415	2915	Lime-Shale	
2915	3625	Shale-Lime	
3625	4000	Lime	
4000	4135	Lime-Shale	
4135	4412	Lime	
4412	4525	Chat-Lime	
4525	4690	Lime	
4690	4789	Lime-Shale	
4789	4800	Shale	
4800	4815	Shale-Sand	
4815 - TD			

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above
Drillers' Well Log is true and correct to the best of my knowledge and belief and
according to the records of this office.

GABBERT-JONES, INC.

James S. Sutton II
JAMES S. SUTTON II

Subscribed and sworn to before me this 24th day of October, 1978.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1979.

