


20862
15:135-20682-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

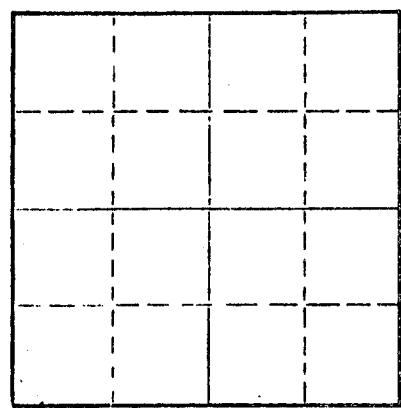

Locate well correctly on above
Section Plat

Ness County. Sec. 13 Twp. 16 Rge. (E) 26 (W)
Location as "NE/CNW&SW&" or footage from lines C/SW NE
Lease Owner Thunderbird Drilling, Inc.
Lease Name Evel "E" Well No. 1
Office Address 4328 East Kellogg, P. O. Box 18407, Wichita, Kansas 67218
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 17 19 74
Application for plugging filed April 17 19 74
Application for plugging approved April 17 19 74
Plugging commenced April 17 19 74
Plugging completed April 17 19 74
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4555 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	339'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Hole plugged as follows: Plugged at 800' with 70 sacks of common cement; plugged at 240' with 20 sacks of common cement; plugged at 40' with 10 sacks of common cement. Plug down at 2:45 P. M. April 17, 1974.

RECEIVED
STATE CORPORATION COMMISSION
APR 25 1974
4-25-74
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Strata Drilling Company
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Kenneth J. Link (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link
Kenneth J. Link
P. O. Box 355, Great Bend, Kansas 67530
(Address)



Subscribed and Sworn to before me this 18th day of April, 1974.
My commission expires December 14, 1977
Elaine H. Taylor Notary Public.

20862
15.135.20682-0000

D R I L L E R S L O G

#1 Level "E"

CASING RECORD:
334.30' of used 8-5/8"
surface casing.

COMPANY: Thunderbird Drilling, Inc.

DESCRIPTION: C/SW NE
Section 13-16S-26W
Ness County, Kansas

CONTRACTOR: Strata Drilling Company

COMMENCED: April 8, 1974

COMPLETED: April 17, 1974

TOTAL DEPTH:
4555'

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Post Rock	0	275	Ran 334.30' of used 8-5/8" surface casing; set and cemented at 339' with 200 sacks of common cement, 2% gel and 3% C. C. Plug down at 2:00 P. M. April 9, 1974.
Shale w/Sand Streaks	275	805	
Shale, Shells, Blaine & Sand	805	1635	
Shale & Sand	1635	2078	
Lime & Shale	2078	3742	
Lime	3742	4025	
Lime & Shale	4025	4111	
Lime	4185	4260	
Lime & Shale	4260	4555	

ROTARY TOTAL DEPTH: 4555'

Ran electric log.

RECEIVED
 STATE CORPORATION COMMISSION
 APR 25 1974
 CONSERVATION DIVISION
 Wichita, Kansas

D. & A.

Hole plugged as follows: Plugged at 800' with 70 sacks of common cement; plugged at 240' with 20 sacks of common cement; plugged at 40' with 10 sacks of common cement. Plug down at 2:45 P. M. April 17, 1974.

STATE OF KANSAS)
) SS.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Kenneth J. Link
Kenneth J. Link

Subscribed and sworn to before me this 18th day of April, 1974.

My Commission Expires:

December 14, 1977

Elaine H. Taylor
Elaine H. Taylor, Notary Public