

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-23477-00-00
Spot: SWNE Sec/Twnshp/Rge: 18-16S-26W
3300 feet from S Section Line, 1980 feet from E Section Line
Lease/Unit Name: NORTON Well Number: 2
County: NESS Total Vertical Depth: 4553 feet

Operator License No.: 5663
Op Name: HESS OIL COMPANY
Address: PO BOX 1009
MCPHERSON, KS 67460

Production Casing Size: 4.5 feet: 4545 WITH 200 SX CMT
Surface Casing Size: 8.625 feet: 239 WITH 150 SX CMT

#147 97

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/12/2003 8:30 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: ARNIE HESS Company: HESS OIL Phone: (620) 241-4640

Proposed Plugging Method: RUN TUBING TO 4100'. PUMP 50 SX CMT & 300# HULLS. PULL TUBING TO 2050'. PRESSURE TEST . PUMP 200# HULLS IF NEEDED. FILL WITH CMT FROM 2050-0'. PUMP 50 SX CMT DOWN ANNULUS IF NEEDED.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 08/12/2003 11:30 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PERFS AT 4534-4539 & 4147-4152'. DV TOOL @ 2050' WITH 450 SX CMT. CMT CIRCULATED TO SURFACE. RUN TUBING TO 4107' & PUMPED 300# HULLS & 50 SX COMMON CMT WITH 2% CC. PULLED TUBING TO 2047'. PUMPED 120 SX CMT. CMT CIRCULATED. PULLED TUBING AND TOPPED OFF WITH 30 SX CMT. TIED ONTO BACKSIDE. PRESSURED UP TO 500#.


RECEIVED
9-17-03
SEP 17 2003

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: TBG

District: 01

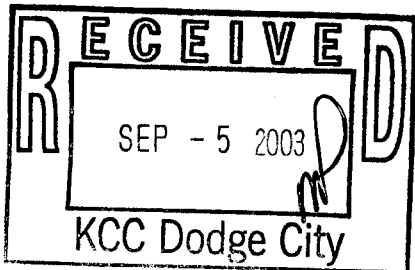

Signed

Michael Maier
(TECHNICIAN)

INVOICED

DATE 9-7-03

INV. NO. 2004060518

[Signature]
Form CP-273