


RECEIVED
STATE CORPORATION COMMISSION
JUN 20 1958
6-20-58
CONSERVATION DIVISION
Wichita, Kansas
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

5-165-01891-0000

WELL PLUGGING RECORD

Rush County, Sec. 17 Twp. 19 Rge. 20 (E) W (W)

NORTH

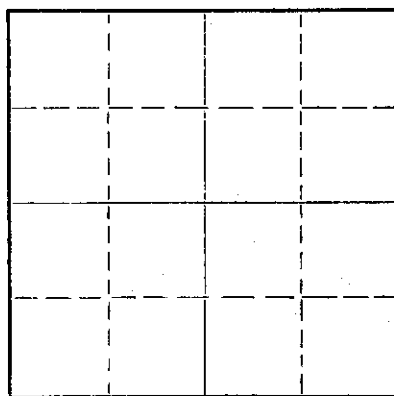

Locate well correctly on above
Section Plat

Location as "NE/CNWSW" or footage from lines
Lease Owner **Drillers & Producers Pipe & Supply**
Lease Name **Schneider #1** Well No.
Office Address **Great Bend, Kansas**
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced **6-3-58** 19
Plugging completed **6-10-58** 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? **yes**

Name of Conservation Agent who supervised plugging of this well **Eldon Petty**
Producing formation Depth to top Bottom Total Depth of Well **4350** Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	500'	none
				5-1/2"	4350'	2669'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked the hole to 4350' and found it open.
Filled w/sand to 4305' and ran 4 sacks of
cement. Pulled 70 jts of 5 1/2" casing to 600'
and circulated 15 sacks of gel mud, pulled
2 jts and pumped in 20 sacks of cement.
Pulled 4 more jts and pumped in 20 more
sacks of cement. Cleared hole and checked
mud to 35', set a rock bridge to 30' and
ran 10 sacks of cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor **West Supply Co., Inc.**
Address **Chase, Kansas**

STATE OF **KANSAS** COUNTY OF **RICE** ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Richard B. Schuch
CHANCE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this **12th** day of **June**, 19**58**

My commission expires **9-27-58**

Thomas V. Huggins
Notary Public.

PLUGGING

FILE SEC. 17 T. 19 R. 20W
BOOK PAGE 104 LINE 33

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock,
Wichita, Kansas

K-165-01891-0000


Company- ARTNELL COMPANY
Farm- Schneider No. 1

SEC. 17 T. 19 R. 20W
NW NE SE

Total Depth. 4421'
Comm. 9-27-57 Comp. 10-13-57
Shot or Treated.

Contractor. Leben Drilling Co.
Issued. 11-1-58

County Rush KANSAS



Elevation 2274' RB

CASING:

8 5/8" @ 515' cem. w/325 sx.
5" @ 4420'

Production. Dry

Figures indicate Bottom of Formations.

shale & lime	235
shale & shells	523
shells & shale	545
shale & redbed	930
sand	1175
sand & shale	1395
shale & redbed	1500
anhydrite	1538
shale & shells	2330.
shale & lime	2560
lime	2715
lime & shale	3810
lime	4327
lime & shale	4380
lime	4400
lime & chert	4421 RTD
Total Depth	

TOPS: (Scout)	
Anhydrite	1500
Heebear	3794
Lansing	3839
Cherokee	4315
Cherokee Sand	4317
Mississippi	4391