


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

15-077-30106-00-00 Form CP-4

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

HARPER County. Sec. 22 Twp. 32S Rge. (E) 5 (W)
Location as "NE/CNW&SW" or footage from lines. NE $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$
Lease Owner DRILLERS PRODUCTION CO., INC.
Lease Name FULTON ESTATE Well No. 1
Office Address 480 - 4TH NATL. BANK BLDG., WICHITA, KANSAS 67202
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed JUNE 29, 1966
Application for plugging filed JULY 6, 1966
Application for plugging approved (BY PHONE) JUNE 29, 1966
Plugging commenced JUNE 29, 1966
Plugging completed JUNE 29, 1966
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well ARCHIE ELVING
Producing formation Depth to top Bottom Total Depth of Well 3380 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	220'	8-5/8"	220'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

FILLED HOLE WITH HEAVY MUD TO 215 FEET. SET FIRST PLUG @ 215 FT. W/ $\frac{1}{2}$ SACK HULLS AND 25 SACKS CEMENT. FILLED HOLE WITH HEAVY MUD TO 40 FEET. SET SECOND PLUG @ 40 FT. W/ $\frac{1}{2}$ SACK HULLS AND 25 SACKS CEMENT PLUS 8 SACKS CEMENT ON TOP OF PLUG. FILLED RAT HOLE W/ 2 SACKS CEMENT. JOB COMPLETE @ 10:15 AM.

RECEIVED
STATE CORPORATION COMMISSION

JUL 11 1966

07-11-1966
CONSERVATION DIV.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GABBERT-JONES, INC.
Address 514 ORPHEUM BLDG., WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

JAMES S. SUTTON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

514 ORPHEUM BLDG., WICHITA, KANSAS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 6TH day of JULY, 1966

Barbara J. Layton
BARBARA J. LAYTON
Notary Public.

My commission expires FEBRUARY 1, 1968

15-077-30106-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

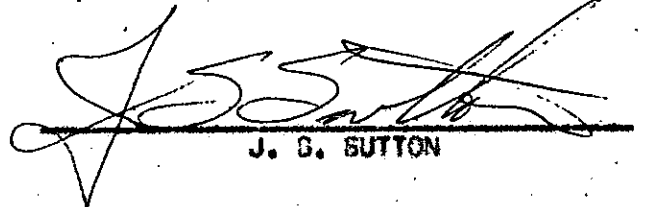
FULTON ESTATE #1
NE 3/4 NE SECTION 22-328-54
HARPER COUNTY, KANSAS

COMMENCED: JUNE 20, 1966
COMPLETED: JUNE 29, 1966

OPERATOR - DRILLERS PRODUCTION Co., INC.

DEPTH		FORMATION	REMARKS
FROM	TO		
0	80	RED BED AND SHALE	
80	220	RED BED	RAN 6 JOINTS OF 6-5/8" CASING, SET @ 220' w/200 BAGGS CEMENT.
220	740	RED BED AND SHALE	
740	860	SHALE	
860	1125	ANHYDRITE, SHALE AND SHELLS	
1125	1255	LIME	
1255	1385	LIME AND SHALE	
1385	1500	LIME	
1500	1855	LIME AND SHALE	
1855	2020	SHALE AND SAND	
2020	2025	LIME	
2025	2975	LIME AND SHALE	
2975	3080	LIME	
3080	3360	LIME AND SHALE	
3360	3380	SHALE AND SAND (CORE)	
3380	TD		DRY AND ABANDONED.


I, J. S. SUTTON, CERTIFY THIS IS A CORRECT COPY OF THE DRILLERS' LOG FOR THE WELL DRILLED IN THE NE 3/4 NE SECTION 22-328-54, HARPER COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.


J. S. SUTTON

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 5TH DAY OF JULY, 1966, PERSONALLY APPEARED J. S. SUTTON, TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.


BARBARA J. LAYTON, NOTARY PUBLIC

MY COMMISSION EXPIRES FEBRUARY 1, 1968.