


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Harper County, Sec. 29 Twp. 32 Rge. 6 E/W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines  
NW SE NW  
Lease Owner Sanders Oil Company  
Lease Name Parsons Well No. 1  
Office Address 910 Sutton Place, Wichita, Ks. 67202  
Character of Well (Completed as Oil, Gas or Dry Hole)



Locate well correctly on above  
Section Plot

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 9-8-80 19  
Plugging completed 9-8-80 19  
Reason for abandonment of well or producing formation  
Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well EMMAH Owens  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4890  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	237'	None
				4-1/2	4648'	3849'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Allied pumped 8 sacks hulls, 25 sacks gel, 125 sacks 50/50 pos, 3% cc.

Plugging complete.

RECEIVED  
STATE CORPORATION COMMISSION  
09-17-1980  
SEP 17 1980

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF Kansas COUNTY OF Rice, ss.  
R. Darrell Kelso (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) R. Darrell Kelso  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of September, 19 80



Elsie Sells  
Notary Public.

My commission expires MAY 31, 1984

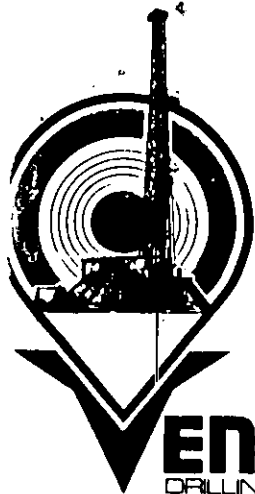

**VENTURE**  
DRILLING  
INCORPORATED

15-077-20532-00-00

WELL LOG

SUITE 1625 KSB&T BLDG. 125 NORTH MARKET WICHITA, KANSAS 67202 (316) 267-1550

PARSON #1 325  
NW SE NW 29-~~25~~-6W  
Harper County, Kansas

Ground Level: 1417'

Owner:  
Sanders Oil Company  
910 Sutton Place  
Wichita, Kansas 67202

Rotary Drilling Contractors:  
Venture Drilling Inc.  
1625 Vickers-KSB&T Bldg.  
Wichita, Kansas 67202

Commenced: July 21, 1979  
Completed: August 26, 1979

Total Depth: 4890'

LOG

0' - 240'	Red Bed Sand
240' - 408'	Lime/Shale
480' - 661'	Sand/Shale
661' - 1319'	Shale
1319' - 1700'	Shale & Lime
1700' - 2170'	Shale & Lime
2170' - 2598'	Shale & Lime
2598' - 2975'	Shale & Lime
2975' - 3428'	Shale & Lime
3428' - 3559'	Lime & Shale
3559' - 3785'	Sand & Shale
3785' - 3925'	Shale & Lime
3925' - 4015'	Lime
4015' - 4125'	Lime & Shale
4125' - 4200'	Lime & Shale
4200' - 4290'	Lime
4290' - 4395'	Lime & Shale
4395' - 4468'	Lime & Shale
4468' - 4515'	Lime & Shale
4515' - 4658'	Lime
4658' - 4740'	Lime & Shale
4740' - 4825'	Lime
4825' - 4840'	Sand
4840' - 4890'	
4890' -	T.D.

Spudded @ 12:00 noon

CASING RECORD

Set Surface casing with 6 jts. of 8 5/8" casing @237' w/200 sks. common w/3% cc 2% gel.  
Plug down @ 11:00 p.m.

Last Circ. @ 3165'  
Last circ. @ 3167'  
DST #1 4441-68  
ISIP - 1210# FSIP - 1494#  
IF - 82# FF - 82#  
Rec. 180' G&HOCM

DST #2 4832' - 4840'

Ran 126 jts. 4 1/2" casing  
Set at 4648' cmt w/125 sks.  
60/40 Posmix 2% gel & 30  
Sks. common latex.  
Plug down @ 5:15 p.m. 8/25/79

*Separated from 4450 4456 - 4 shotper foot.*

RECEIVED  
JUL - 3 1980  
06-09-1980  
Wichita, Kansas