


15-077-20344-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

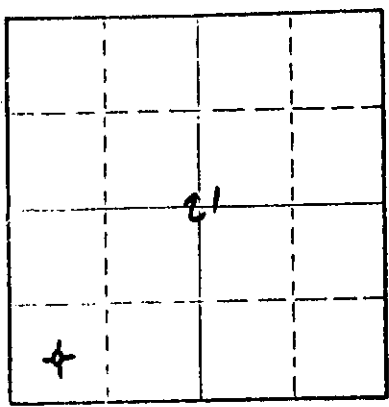

Locate well correctly on above
Section Plat

Harper County, Sec. 21 Twp. 32S Rge. 7W (E) (W)
C-SW-SW

Location as "NE/CNW/SW" or footage from lines
Lease Owner McCoy Petroleum Company
Lease Name Burkholder Well No. 1
Office Address 816 Vickers, KSB&T Bldg., Wichita, Kan. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 2 - 7 19 76
Application for plugging filed 3 - 17 19 76
Application for plugging approved 3 - 19 19 76
Plugging commenced 3 - 22 19 76
Plugging completed 3 - 25 19 76
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstien
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4416 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	263	None
				4 1/2	4407	3752

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped sand from 4400' to 4375'
4 sacks cement from 4375' to 4335'
Ripped pipe at 3752
Wooden bridge at 240'
Rock from 240' to 230'
4 yards ready mix to 230' to top

RECEIVED
STATE CORPORATION COMMISSION

APR 07 1976

CONSERVATION DIVISION
Wichita, Kansas

04-07-1976

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Clarke Corporation
Address Box 187, Medicine Lodge, Kan. 67104

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
John Roger McCoy (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John Roger McCoy
816 Vickers-KSB&T Building (Address)

Subscribed and sworn to before me this 6th day of April, 1976

Christina Louise Duncan
Christina Louise Duncan Notary Public.

My commission expires 2-20-78

Christina Louise Duncan
NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. FEB. 20, 1978

WELL LOG
Burkholder #1
SW SW 21-32S-7W
Harper County, Kansas

15-077-20344-00-00

Name of Operator: McCoy Petroleum Co.
816 Vickers KSB & T Bldg.
Wichita, Kansas 67202

Date Completed: February 8, 1976

FROM	TO	
0	1200	Red bed and shale
1200	3925	Lime and shale
3925	4420	Lime
4420		Total Depth

RECEIVED
STATE COMMISSION

APR 07 1976
04-07-1976
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS

COUNTY OF BARTON ss

Gary L. Hawk, Secretary of Sweetman Drilling, Inc., being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct.

Gary L. Hawk
Gary L. Hawk

Subscribed and sworn before me this 14th day of February, 1976.

MaryAnn Schwaborn
Notary Public Barton County

My Commission Expires 7-10-77

