

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-135-23,814-6000

LEASE NAME McKinnis

WELL NUMBER 2

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

2970 Ft. from S Section Line

3630 Ft. from E Section Line

SEC. 24 TWP. 16S RGE. 26 1/8/4(W)

COUNTY Ness

LEASE OPERATOR Scott T. Lutz

ADDRESS P. O. Drawer D, Shell Knob, MO 65747

PHONE#(316) -653-4178 OPERATORS LICENSE NO. 7200

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 4/26/94

Plugging Commenced 4/27/94

Plugging Completed 4/27/94

The plugging proposal was approved on 4-27-94 (date)

by Richard Lacy (KCC District Agent's Name).

Is ACO-1 filed? No If not, Is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4602'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	275'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.

Mud laden fluid 4602'-2030' 40 sks cement @ 300'
 50 sks cement @ 2030' 10 sks cement @ 40'
 80 sks cement @ 1250' 10 sks in mousehole
 40 sks cement @ 600' 15 sks in rathole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Scott T. Lutz

STATE OF KANSAS COUNTY OF RUSSELL, ss.


Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Kyle B. Branum

(Address) Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 28th day of April, 1994

Glenda R. Tiffin
Glenda R. Tiffin, Notary Public



STATE CORPORATION COMMISSION
APR 29 1994
429-94
CONSERVATION DIVISION
Wichita, Kansas
Form CP-4
Revised 05-88

15735-28814-0006

EMPHASIS OIL OPERATIONS
A Division of N-B Company, Inc.
P. O. BOX 506
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Scott T. Lutz
P. O. Drawer D
Shell Knob, MO 65747

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: McKinnis WELL #2

LOCATION: SW SE NW
Section 24-16S-26W
Ness County, Kansas

LOGGERS TOTAL DEPTH: 4601'

ROTARY TOTAL DEPTH: 4602'

COMMENCED: 4/18/94

CASING: 8-5/8" @ 275' w/160 sks cement

ELEVATION: 2607' K.B.

COMPLETED: 4/27//94

STATUS: Dry Hole


DEPTHS & FORMATIONS

(All measurements from K.B.)

Sand & Shale	278'	Shale & Lime	3730'
Anhydrite	1997'	Lime & Shale	3905'
Shale	2031'	Mississippi	4530'
Lime & Shale	3360'	R.T.D.	4602'

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

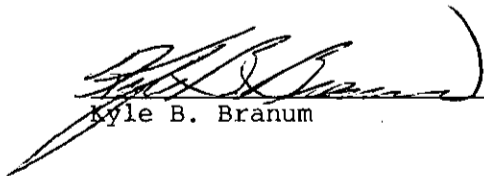


Kyle B. Branum

Subscribed and sworn to before me on April 28, 1994.

My commission expires: February 6, 1996.





Glenda R. Tiffin, Notary Public

RECEIVED
STATE CORPORATION COMMISS
APR 29 1994
CONSERVATION DIVISION
Wichita, Kansas