


15-077-20452-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Harper County, Sec. 16 Twp. 32SRge. 7W ~~XXX~~
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
510' FNL & 660' FWL
Lease Owner Texas Oil & Gas Corp.
Lease Name Muir "B" Well No. 1
Office Address 200 W. Douglas, Suite 300, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole
Date Well completed October 2, 1977
Application for plugging filed Verbal Application 1977
Application for plugging approved Verbal Approval 1977
Plugging commenced October 2, 1977
Plugging completed October 2, 1977
Reason for abandonment of well or producing formation _____

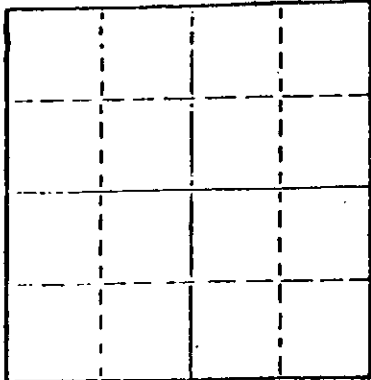

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4750'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	263'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4750 ft. (rotary total depth) to 270 ft. Set plug at 270 ft. and cemented with 35 sacks cement.
Filled hole with heavy rotary mud from 270 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 12 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well Cementing pump truck through 4-1/2 inch drill pipe.

OCT 13 1977
10-13-1977


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services
410 Union Center Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (~~XXXXXXXXXX~~ of owner) ~~XXXXXXXXXXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Kansas 67202
(Address)



SUBSCRIBED AND SWORN TO before me this 12th day of October, 19 77

Elsie Willison
Elsie Willison - Notary Public.

My commission expires June 30, 1978


KANSAS GEOLOGICAL SOCIETY API # - 15-077-20,452-00 00
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Texas Oil & Gas Corp.**
 FARM **Muir "B"** NO. **1**

SEC. **16** T. **32S** R. **7W**
 LOC. **510' PNL & 660' PNL**

TOTAL DEPTH **4750'**
 COMM. **September 21, 1977** COMP. **October 2, 1977**
 SHOT OR TREATED
 CONTRACTOR **H-30, Inc.**
 ISSUED **October 12, 1977**

COUNTY **Harper**



CASING
 20 10
 15 8 **-5/8" 263' cemented w/275 sxs cement** ELEVATION **1426 K.B.**
 12 6
 13 5

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Red Bed and Shale	1977'
Shale and Lime	2542'
Lime and Shale	37'0"
Lime	3996'
Lime and Shale	4261'
Lime	4750'
Rotary Total Depth	4750'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.


Dean Britting
 Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 12th. day of October, 1977.

Elsie Willison
 Elsie Willison - Notary Public

My Commission Expires:
June 30, 1978



10-13-1977