

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-20948-00-00
Spot: CNWNWSE Sec/Twnshp/Rge: 31-16S-26W
2339 feet from S Section Line, 2437 feet from E Section Line
Lease/Unit Name: JENNISON Well Number: 1
County: NESS Total Vertical Depth: 4624 feet

Operator License No.: 9860
Op Name: CASTLE RESOURCES, INC.
Address: BOX 87
SCHOENCHEN, KS 67667

Conductor Pipe: Size feet: 150.28
Surface Casing: Size 8.625 feet: 303
Production: Size 4.5 feet: 4362 WITH 125 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 11/27/2002 9:50 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: GERALD WALKER Company: CASTLE RESOURCES Phone: (785) 625-5155

Proposed Plugging Method: PUMP 300# HULLS & 40 SX CMT FOR BOTTOM PLUG. GEL SPACER TO 1200'. PERFORATE AT 1200' & CIRCULATE TO SURFACE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 11/27/2002 11:50 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:


PERFS AT 4014-4198'. PUMPED 40 SX CMT & 200# HULLS TO BOTTOM. MAXIMUM PRESSURE 1000#. PERFORATED AT 1200'. PUMPED 150 SX CMT. SHUT IN WITH 500#. TIED ONTO BACKSIDE & PUMPED 50 SX CMT. PRESSURED TO 500# AND HELD.

RECEIVED
12-5-02
DEC 05 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

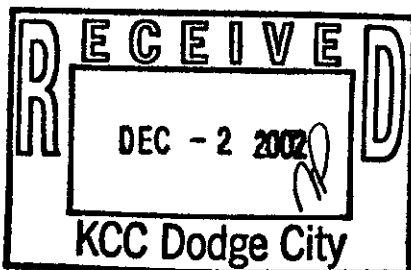

Signed

Michael Maier
(TECHNICIAN)

INVOICED

DATE 12-5-02

INV. NO. 2003060914