

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-077-21342-00-00  
Spot: CNWNE Sec/Twnshp/Rge: 1-33S-6W  
4620 feet from S Section Line, 1980 feet from E Section Line  
Lease/Unit Name: GOWING A Well Number: 1  
County: HARPER Total Vertical Depth: 4867 feet

Operator License No.: 30535

Operator Name: HARTMAN OIL CO., INC.

Address: 1223 N. ROCK ROAD  
WICHITA, KS 67206

6/23

Conductor Pipe: Size

feet:

Surface Casing: Size 8.625

feet: 262

175 SX CMT

Production: Size 5.5

feet: 4549

150 SX CMT

Liner: Size

feet:

158.18

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 06/21/2000 12:00 AM

Plug Co. License No.: 31925

Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: STAN T. MITCHELL

Company:

Phone: (316) 272-3988

Proposed Plugging Method: PLUG BACK W/SAND TO 50' ABOVE MISS PERFS @ 4402-10' TO 4350' & CAP W/5 SX CMT, RUN FREE POINT ON 5 1/2" CSG, PULL FREE CSG TO 1000' SPOT 35 SX (60-40) POZ W/6% GEL, PULL TO 350', CIRCULATE CMT (60-40) POZ W/6% GEL TO SURFACE, PULL ALL CSG & FILL SURFACE PIPE W/CMT.

Plugging Proposal Received By: STEVE VANGIESON

WitnessType: Plugging Operations Partially Witnessed

Date/Time Plugging Completed: 06/23/2000 3:00 PM

KCC Agent: STEVE VANGIESON

Actual Plugging Report:

The perfs were covered w/sand to 4329' and capped w/5sxs of cement. The casing was recovered from 3335' and pulled to 1150' where 35sxs of cement was spotted. The casing was pulled to 750', where 35sxs of cement was spotted. The casing was pulled and the cement was topped off.

RECEIVED  
KCC DISTRICT #2

DEC 06 2000


WICHITA, KS

Remarks: ALLIED CEMENTING 60/40 4% GEL

Plugged through: CSG

District: 02

Signed

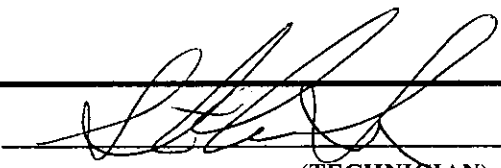

(TECHNICIAN)

INVOICED

DATE

12/11/00

INV. NO.

2001061101