


15135-20901-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

### WELL PLUGGING RECORD

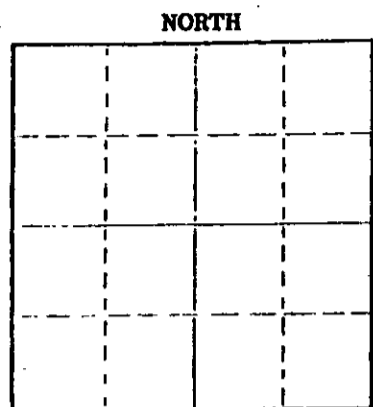

Locate well correctly on above Section Plat

Ness County, Sec. 34 Twp. 17 Rge. 23 (E) (W) X  
 Location as "NE/CNW/SE/SW" or footage from lines C NW NW  
 Lease Owner Twin Western Resources Inc.  
 Lease Name Lehner Well No. #1  
 Office Address Suite 518, 200 E. 1st St. Wichita, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole)  
 Date well completed 19  
 Application for plugging filed 19  
 Application for plugging approved 19  
 Plugging commenced 3-7-75 19  
 Plugging completed 3-15-75 19  
 Reason for abandonment of well or producing formation  
 If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
 Producing formation Depth to top Bottom Total Depth of Well 4416' Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4416'	3339.53'
				8 5/8"	261'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 4375'. Mixed and ran 5 sacks cement thru dump hauler.  
 Squeezed hole with 20 sacks gel - 70 sacks cement and 10 sacks gel. Released plug 1 sacks hulls and displaced with 50 sacks cement. 50/50 pozmix 6% gel.

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor Southwest Casing Pulling Co.  
 Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
 Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
 Box 364 Great Bend, Kansas 67530  
 (Address)

SUBSCRIBED AND SWORN TO before me this 24 day of October 1976  
 Sidney J. Miller Notary Public



RECEIVED  
 STATE CORPORATION COMMISSION  
 3-18-75  
 MAR 18 1975  
 CONSERVATION DIVISION  
 Wichita, Kansas

DRILLERS LOG

#1 Lehner

CASING RECORD: 256.35' of new 8-5/8" surface casing.	COMPANY: Twin Western Resources, Inc.	DESCRIPTION: C/NW NW Section 34-17S-23W Ness County, Kansas
TOTAL DEPTH: 4416'	CONTRACTOR: Strata Drilling Company	
	COMMENCED: October 19, 1974	
	COMPLETED: October 31, 1974	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil, Shale & Sand	0	275	Ran 256.35' of new 8-5/8" surface casing; set and cemented at 261.35' with 175 sacks of common cement, 2% gel and 3% C. C. Plug down at 12:00 A. M. 10-20-74.
Shale	275	1013	
Blaine	1013	1025	
Shale	1025	1105	
Sand	1105	1350	
Shale	1350	1550	
Shale & Lime w/Sand Streaks	1550	1955	
Lime & Shale	1955	4312	
Lime	4312	4345	
Lime & Shale	4345	4412	
Chert	4412	4416	

RECEIVED  
STATE CORPORATION COMMISSION

JAN 14 1975

CONSERVATION DIVISION

Wichita, Kansas

ROTARY TOTAL DEPTH: 4416'

Ran electric log.

Ran 5 1/2" new casing, set and cemented at 4415 1/2' with 75 sacks of 60-40 pozmix with 20 barrels salt flush, salt saturated and 25 sacks of common cement with latex and nylon fiber. Plug down at 3:40 A. M. October 31, 1974.


STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

sworn to before me this 1st day of November, 1974.



*Elaine H. Taylor*  
Elaine H. Taylor, Notary Public