

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 19 Twp. 32 Rge. 14 (E) W (W)

Location as "NE/CNW/SW" or footage from lines. C NE NW

Lease Owner Morgenstern & Specter, Inc.

Lease Name Fritz Well No. 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 7-22-63 19

Plugging completed 7-24-63 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

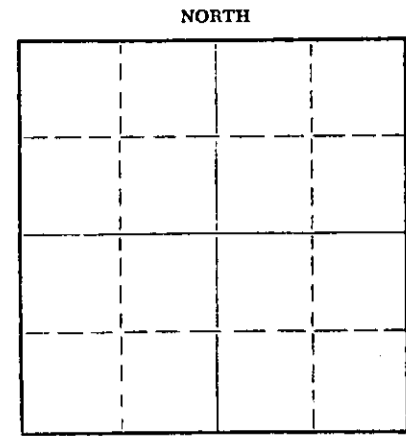

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Depth to top Bottom Total Depth of Well 4910 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	225'	None
				5-1/2"	4906'	3652'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4910', sanded to 4890' and dumped 5 sacks of cement @ 4890' with dump bailer. Pulled 5 1/2" casing, mudded hole to 250', set rock bridge to 240' and ran 20 sacks of cement @ 240'. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

AUG 2 1963

8-2-63

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNEIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
Noel J. Knight (owner) or ~~owner~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of July, 1963

Milton J. Volin
Notary Public.

My commission expires May 20, 1964

15-007-00374-0000
 WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


Company- Aurora Gasoline Company
 Farm- Fritz Stumph-Smith No. 1
 Community

SEC. 19 T. 32 R. 14W
 C NE NW

Total Depth. 3229'
 Comm. 8-2-57 Comp#-22-57
 Shot or Treated.
 Contractor. Aylward Drilling Company
 Issued. 12-21-57

County Barber

KANSAS



Elevation. 2000 DF.

Production. 1,000,000 CPG.

CASING:

8 5/8" @ 225' W/175 sks. cem.
 5 1/2" @ 4906' W/200 sks. cem.

Figures indicate Bottom of Formations.

sand	90
red rock	225
red rock & gypsum	781
red bed, shells & shale	1265
shale & lime strks.	1535
shale & lime	2295
lime & shale	2430
lime	2605
lime & shale	2685
lime	2825
shale & lime	2905
lime & shale	3100
shale	3245
lime & shale	3415
shale & lime	3510
lime	3625
lime & shale	3710
lime	3790
shale & lime	4032
lime & shale	4218
shale & lime	4279
lime & shale	4326
lime	4795
lime & chert	4800
lime	4893
lime & shale	4907 TD
lime	3229'
Total Depth	
TOPS:	

Heebner	4091
Lansing	4260
Base Kansas City	4703
Massey	4720
Mississippian	4755

Drill Stem Test:

- #1 4701-46 Open 1 hr. Gas in 3 min.
 1,630 MCFG in 10 min., 1,790 MCFG in
 15 min., 1,860 MCFG in 20 min.
 Rec. 30' muddy salt wtr. plus 120'
 GCM FP 335#-335#.
 IBHP 1769#-FBHP 1730#.
- #2 4755-4800 Open 1 hr.
 Rec. 20' mud
 FP 45#-45#.
 IBHP 80#/15"-FBHP 45#/30"

RECEIVED
 STATE CORPORATION COMMISSION

JUL 18 1963
 7-18-63
 CONSERVATION DIVISION
 Wichita, Kansas