


15-007-20405-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

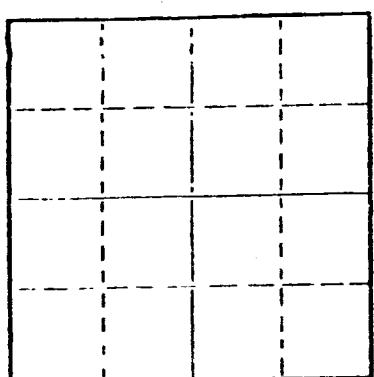

Locate well correctly on above
Section Plat

Barber County, Sec. 8 Twp. 32S Rge. 10W (X) (W)
Location as "NE/CNW/SW" or footage from lines C SE SW
Lease Owner Anadarko Production Company
Lease Name Ricke "A" Well No. 1
Office Address P.O. Box 351 Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed April 10, 1976
Application for plugging filed verbal application 1976
Application for plugging approved verbal approval 1976
Plugging commenced April 10, 1976
Plugging completed April 10, 1976
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G.R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4,460 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS					CASING RECORD	
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	325'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Filled hole with rotary mud from 4,460 feet (rotary total depth) to 300 feet. Set plug at 300 feet and cemented with 50 sxs cement. Filled hole with heavy rotary mud from 300 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 15 sxs cement, 2 sxs cement in rathole.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sun Oil Well Cementing, INC.
Address P.O. Box 169 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick ss.
Dean Britting - Agent

I, Dean Britting, of owner) or (Agent) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main Wichita, Kans. 67202
(Address)

Subscribed and sworn to before me this 15th day of April, 1976



June 30, 1978

Elsie Willison
Notary Public.

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Anadarko Production Company**


SEC. **8** T. **32S.** 10W
LOC. **C-SE-SW**

FARM **Ricke "A"** NO. **1**

TOTAL DEPTH **4,460'**
COMM. **March 30, 1976**
SHOT OR TREATED
CONTRACTOR **H-30, INC.**
ISSUED **April 15, 1976**

COMP. **April 10, 1976**

COUNTY **Barber**
KANSAS



CASING
20 10
15 8 5/8" 32% cemented w/300 sxs cement ELEVATION **1,502' OR**
12 6
13 5
PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale and Sand	329'
Red Bed	520'
Red Bed and Shale	690'
Shale	1,470'
Shale and Lime	1,680'
Lime and Shale	3,962'
Lime	4,273'
Lime and Shale	4,360'
Lime and Chert	4,380'
Lime	4,460'
Rotary Total Depth	4,460'


I hereby certify the above and foregoing to be
a true and correct log of the above described well
as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public
in and for said county and state this 15th day of April,



Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:
June 30, 1978

04-16-1976