

15-135-21408-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 27 Twp. 17S Rge. 23W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
C SW SW

Lease Owner Strata Drilling Company
Lease Name Lehner Well No. #2
Office Address P. O. Box 355, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date Well completed 4-22-78 19
Application for plugging filed 4-22-78 19
Application for plugging approved 4-22-78 19
Plugging commenced 4-22-78 19
Plugging completed 4-22-78 19

Reason for abandonment of well or producing formation dry hole


If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4415'

Show depth and thickness of all water, oil and gas formations.

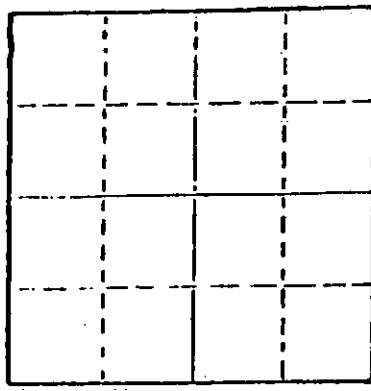

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Holes plugged with 50-50 pozmix, 6% gel, as follows: 70 sacks @ 650', 20 sacks @ 240', 10 sacks @ 40'. Plug down at 5:30 p.m., April 22, 1978.

RECEIVED
STATE CORPORATION COMMISSION
MAY 19 1978
5-19-78
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor _____

STATE OF KANSAS COUNTY OF BARTON, ss.
Charles W. Steincamp (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of April, 1978.
Loneita Barry Notary Public.

My commission expires 3-28-80



DRILLERS LOG

Lehner #2

CASING RECORD: 7 jts. used 8-5/8" surface casing	COMPANY: Strata Drilling Company	DESCRIPTION: C SW SW Section 27-17S-23W Ness County, Kansas
TOTAL ROTARY DEPTH: 4415'	CONTRACTOR: Strata Drilling Company	ELEVATION: 2373' KB
	COMMENCED: April 16, 1978	
	COMPLETED: April 22, 1978	

D & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post rock and shale	0	305	Ran 286' used 8-5/8" surface casing, set and cemented @ 291' with 180 sacks common cement, 2% gel, 3% C.C. Cement circulated. Plug down at 5:30 p.m., April 16, 1978.
Shale and sand	305	1650	
Anhydrite	1650	1695	
Shale	1695	2590	
Lime and shale	2590	4415	
			Ran one drill stem test.
			Hole plugged with 50-50 pozmix, 6% gel as follows: 70 sacks @ 650', 20 sacks @ 240', 10 sacks @ 40'. Plug down @ 5:00 p.m., April 22, 1978.

RECEIVED
STATE CORPORATION COMMISSION

MAY 19 1978

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

Charles W. Steincamp
Charles W. Steincamp

Sworn to and subscribed before me this 28th day of April, 1978.

My appointment expires 3-28-80.

Loneita Barry
Loneita Barry, Notary Public

