

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Pawnee County, Sec. 33 Twp. 21S Rge. 16 (E) (W)

Location as "NE/CNW/SW" or footage from lines 330' W of EL; 235' N of EL, NE/4

Lease Owner Sunray Oil Corporation

Lease Name Hill-Kay Well No. 1

Office Address Box 195, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 18 19 53

Application for plugging filed December 18 19 53

Application for plugging approved December 21 19 53


Plugging commenced December 18 19 53

Plugging completed December 18 19 53

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

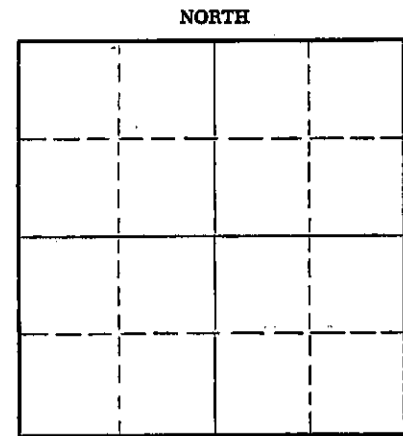

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 3955 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing-KC		3536	3753	13 3/8 8 5/8	44 994	none none
Marmaton-Chert		3791	3836			
Conglomerate		3836	3918			
Arbuckle		3918	3955			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3955' TD. Mudded hole to 300', placed 35 sax cement. Mudded hole to 40', placed 15 sax cement. Dry hole plugged and abandoned.

Well log attached.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stickle Drilling Company
Address Tulsa, Oklahoma

STATE OF KANSAS, COUNTY OF BARTON
Robert K. Crouch (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert K. Crouch

Box 195, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of December, 19 53

My commission expires December 24, 1956

Notary Public.

PLUGGING
FILE SEC 33 T 21 R 16
BOOK PAGE 2 LINE 29

RECORDED
STATE CORP
COMM

Sunray Oil Corporation
Tulsa, Oklahoma

Tulsa, Oklahoma
December 21, 1953

CONTRACTOR: Stickle Drilling Company
Drilling Commenced: December 2, 1953
Drilling Completed: December 18, 1953

Hill-Kay #1 SE-SE-NE
Section 33-21S-16W
Pawnee County, Kansas

DRILLERS LOG

Clay & Shale	0-310
Shale & Shells	310-350
Shale	350-428
Sand	428-535
Red Bed	535-985
Anhydrite	985-1015
Shale & Shells	1015-1735
Shale & Lime	1735-1857
Lime & Shale	1857-2220
Lime	2220-2295
Lime & Shale	2295-2415
Shale & Lime	2415-2570
Lime & Shale	2570-3090
Lime	3090-3408
Lime & Shale	3408-3544
Lime	3544-3775
Lime & Chert	3775-3823
Conglomerate	3823-3910
Conglomerate & Lime	3910-3938
Arbuckle	3938-3955 TD

I, Fred E. Stickle hereby certify the above to be a true and complete Drillers Log of Sunray Oil Corporation's Hill-Kay #1 SE-SE-NE-Section 33-21S-16W, Pawnee County, Kansas.

Fred E. Stickle
Fred E. Stickle

Lillian T. Bonham
Notary Public

February 13, 1956
My Commission Expires

