

15-145-00974-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Pawnee County, Sec. 33 Twp. 21 Rge. 16 (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines SW/4 - NE/4 - SE/4

Lease Owner Rocket Drilling Company

Lease Name Wife Well No. 1

Office Address Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 4 19 57

Application for plugging filed October 16 19 56

Application for plugging approved October 17 19 56

Plugging commenced 12-22 19 57

Plugging completed 12-26 19 57

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Brodfoot

Producing formation Depth to top Bottom Total Depth of Well 3878 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	991	None
				5 1/2	3878	1021.87

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole to 3825' - dumped 5 sks cement - pulled pipe - bailed oil off of fluid - set plug at bottom of surface pipe - set 15' rock bridge - dumped 30 sks cement. - mudded hole to 300' set 10' rock bridge - dumped 25 sks cement with bailer - mudded hole to 40' - set 10' rock bridge - dumped 10 sks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 22 1958  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Company License # 236

Address Box 569 Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

L. H. Myrick (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. H. Myrick

352 N. Broadway, Wichita, Kansas

(Address)


SUBSCRIBED AND SWORN TO before me this 16th day of January, 19 58

Zella Ford  
Notary Public.

My commission expires 8-7-1961

PLUGGING  
FILE SEC. 33 T. 21 R. 16 W  
BOOK PAGE 108 LINE 3

REC'D JAN 14 1958

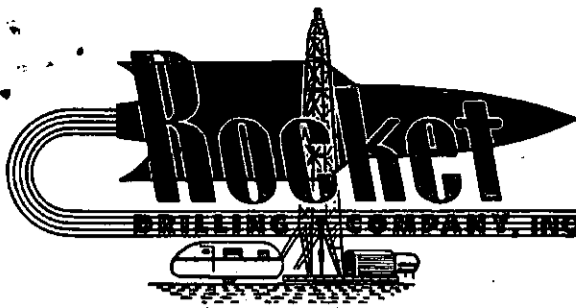

DRILLING COMPANY, INC. • PHONE 3-1229 • 352 N. BROADWAY • WICHITA, KANSAS

Rocket Drilling Company, Inc.  
 #1 Well  
 SW/4 NE/4 SE/4 Section 33-21S-16W  
 Pawnee County, Kansas

Elevation: 1989 Gr.; 1992 D.F.; 1994 R.B.  
 Spudded: September 10, 1956  
 Rotary Completed: September 20, 1956  
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

991' 8-5/8" O.D. 24# seamless casing cemented with 380 sacks cement.  
 3878' 5-1/2" O.D. 14# seamless casing cemented with 120 sacks cement.

DRILLERS LOG

Cellar	0 to 75	Sand	2405
Sand	90	Lime & Shale	2520
Shale & Shells	420	Shale	2700
Sand	535	Shale & Lime	3080
Sand & Shale	640	Lime & Shale	3220
Shale	985	Lime	3364
Anhydrite	1020	Lime & Shale	3475
Shale	1491	Shale & Lime	3552
Shale, Salt & Lime	1850	Lime & Shale	3635
Shale & Lime	1915	Lime	3733
Sand	1925	Lime & Shale	3825
Lime	2090	Lime & Arbuckle	3843
Sand	2100	Arbuckle	3878 T.D.
Lime	2395		

**RECEIVED**  
 STATE CORPORATION COMMISSION

OCT 17 1956

CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

I hereby certify that to the best of my knowledge and belief, the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

<b>PLUGGING</b>	
FILE	SEC. 33 T. 21 R. 16W
BOOK	PAGE 108 LINE 3

*L. H. Myrick*  
 L. H. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 24th day of September, 1956.

My commission expires:  
 10/28/1959

*Janice Helmer Spence*  
 Notary Public