

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Pawnee County, Sec. 33 Twp. 21S Rge. 16W (E) (W)

Location as "NE/CNW/SW" or footage from lines C N/2 S/2 SW

Lease Owner Rocket Drilling Company, Inc.

Lease Name Larned Townsite Unit 10 Well No. 1

Office Address 352 North Broadway, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 19 19 56

Application for plugging filed August 3 19 56

Application for plugging approved August 6 19 "

Plugging commenced August 5 19 "

Plugging completed August 9 19 "

Reason for abandonment of well or producing formation Non-Productive

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. R. M. Brundege

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3889 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	981	-0-
				5-1/2	3889	3038

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled with sand from 3874 to 3835 - dumped 5 sacks cement; squeezed well with 135 sacks cement by Globe Cementing Company

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 18 1956  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor R & D Casing Pulling Company (License #236)  
Address Box 569, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
L. H. Myrick (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) L. H. Myrick  
352 North Broadway, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 17 day of August, 19 56

My commission expires 10/28/1959

Jeanne Helmer Spence  
Notary Public.

PLUGGING  
FILE SEC 33T.21 R.16W  
BOOK PAGE 86 LINE 39

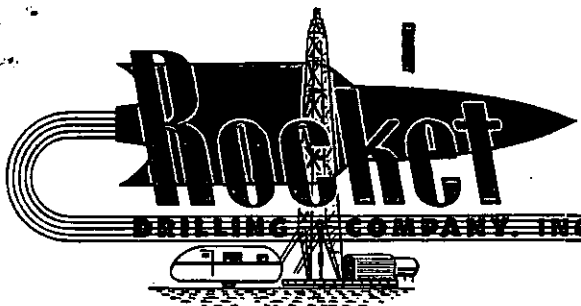

DRILLING COMPANY, INC. P.O. Box 1-1279 352 N. BROADWAY WICHITA, KANSAS

Rocket Drilling Company, Inc.  
 #1 Larned Townsite Unit #10  
 N/2 S/2 SW/4 Section 33-21S-16W  
 Pawnee County, Kansas

Elevation: 1993 Gr.; 1996 D.F.; 1998 R.B.  
 Spudded: July 7, 1956  
 Rotary Completed: July 19, 1956  
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

981: 8-5/8" O.D. 24# seamless casing cemented with 410 sacks cement.  
 3889: 5-1/2" O.D. 14# seamless casing cemented with 120 sacks cement.

DRILLERS LOG

Sand	0 to 101	Lime & Shale	2270
Sand & Shale	415	Shale & Lime	2435
Shale	435	Shale	2625
Sand	620	Shale & Lime	3125
Red Bed	803	Lime & Shale	3279
Shale	975	Shale & Lime	3510
Anhydrite	1000	Lime & Shale	3623
Shale	1090	Shale & Lime	3720
Shale, Shells & Salt	1775	Lime & Shale	3723
Shale & Shells	1850	Lime	3889 T.D.
Shale & Lime	2137		

RECEIVED  
 STATE OF KANSAS  
 NOTARY PUBLIC  
 L. H. MYRICK

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

I hereby certify that to the best of my knowledge and belief the foregoing log is true and correct.

ROCKET DRILLING COMPANY, INC.

L. H. Myrick  
 L. H. Myrick

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 23rd day of July, 1956

My commission expires:

10/28/1959

James Selmer Spence  
 Notary Public

PLUGGING  
 FILE SEC. 33 T. 21 R. 16W  
 BOOK PAGE 86 LINE 39