


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

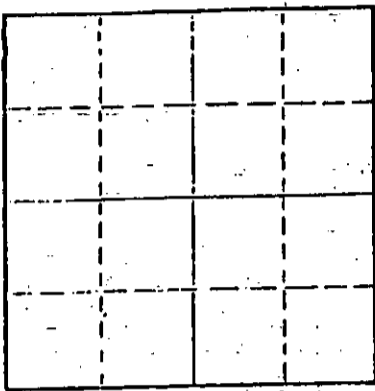

Locate well correctly on above
Section Plat

Ness County, Sec 12 Twp 18 Rge 21 (E) (W)X
Location as "NE/CNW/SE" or footage from lines NE/NE/NE
Lease Owner Four-Way Operating, Inc.
Lease Name ELMORE (OWWO) Well No. 1
Office Address Box 698, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed August 25 1976
Application for plugging approved 19
Plugging commenced August 31 1976
Plugging completed September 3 1976
Reason for abandonment of well or producing formation depleted
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4625 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CORPORATION	CONTENTS	FROM	TO	SIZE	PUT IN	PULLED OUT
					8 5/8"	268'	none
					5 1/2"	4238'	421.74'
SEP 08 1976 9-8-76 CONSERVATION DIVISION WICHITA, KANSAS							

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Measured TD, dumped sand to 4100' and 5 sacks cement.
Shot pipe @ 500' & 400'.
Pulled a total of 13 joints of 5 1/2" casing.
Plugged well with 3 sacks hulls, 20 sacks gel and 125 sacks Pozmix with 2% added gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698, Great Bend, Kansas 67530
(Address)

Subscribed and Sworn to before me this 7th day of September 1976

My commission expires May 21, 1980
Marla K. Haslam Notary Public

DRILLERS' LOG

Well Owner: R. W. Shields
 Farm Name: Elmore Well No. 1
 Commenced: 7/10/58
 Completed: 7/27/58
 Total Depth: 4625'
 Casing: 8 5/8" @ 268' cemented *4/200 sacks*
 5 1/2" @ 4238' cemented *4/125 sacks*

NE NE NE
 Sec. 12-18S-21W
 Ness County, Kansas
 Elevation:
 Production:

Contractor: Peel Brothers, Inc.

Figures below indicate bottoms of formations:

Surface clay	0	15
Clay and shale		268
Shale and sand		580
Shale		760
Sand		1070
Shale and red bed		1260
Shale and sand		1315
Shale		1390
Gyp		1400
Anhydrite		1440
Shale		1645
Shale and shells		1845
Sand and shale		2055
Shale and lime		2375
Lime		2480
Shale and lime		2895
Lime		3080
Shale and lime		3290
Lime		3445
Lime and shale		3535
Lime		3975
Lime and shale		4050
Lime		4108
Lime and shale		4129
Sand, lime and shale		4147
Lime		4210
Lime and chert		4255
Lime		4330
Lime and shale		4365
Lime		4625
Total Depth		4625

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 31 1969
 CONSERVATION DIVISION
 Wichita, Kansas

The above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.

BY *Mendell G. Peel*

SUBSCRIBED AND SWORN to before me this 29th day of July, 1958

My commission expires: April 27, 1960

Luck Brant
 Notary Public