


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Harper County, Sec. 12 Twp. 33^S Rge. 6 E/W
Location as "NE/CNW/SW" or footage from lines
C-SW-NW

Lease Owner Tucker Exploration Co., Inc.
Lease Name Wethington Well No. 1
Office Address 2546 W. Main, Littleton, Colo. 80120
Character of Well (Completed as Oil, Gas or Dry Hole)

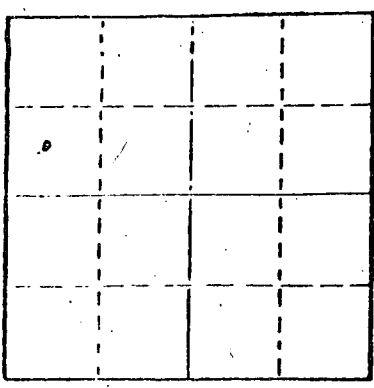

Oil
Date Well completed 12-30-80 19
Application for plugging filed 1-27-81 19
Application for plugging approved 1-28-81 19
Plugging commenced 4-15-81 19
Plugging completed 4-28-81 19
Reason for abandonment of well or producing formation
Non commercial Value

If a producing well is abandoned, date of last production
None 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Leslie
Producing formation _____ Depth to top 4787' Bottom 4788' Total Depth of Well 4850'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8 5/8"	289'	0'
Production				4 1/2"	4850'	3417'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 1 sk. hulls & 35 sks. cement to 4120' pressured to 750 lbs.
Displaced to Surface
Pumped 15 sks. gel - 8 sks. hulls - 10 sks. gel & 125 sks. cement 450' to 0'
Shut in pressure 900 lbs.
Allied cementing, Kiowa, Ks. Pump truck
Cut off 8 5/8", 3' below ground level

RECEIVED
STATE CORPORATION COMMISSION
05-05-1981
MAY 5 1981

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Midwest Casing Pulling Service, Box F, Sublette, Ks. 67877
Permit # 766


STATE OF Kansas COUNTY OF Haskell, ss.
I, Edgar J. Eves (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edgar J. Eves
Box F, Sublette, Ks. 67877
(Address)

SUBSCRIBED AND SWORN TO, before me this 1st day of May, 1981

Sandra L. Eves
Notary Public.

My commission expires 12-6-84



15-077-20645-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Wethington #1
SW-NW Sec 12-338-6W
Harper County Kansas

Commenced: 12-13-80

Completed: 1-6-81

OPERATOR: TUCKER EXPLORATION CO., INC.

Depth	Formation	Remarks
0 297	Redbed-Shale	Ran 7 jts of 24# 8 5/8"
297 820	Redbed	csg set @ 289' Cemented
820 1300	Redbed-Shale	w/250 sks Class A
1300 1520	Shale-Shells	2% Gel - 3% CC
1520 1720	Shale	PD @ 3:00 a.m. 12-14-80
1720 1920	Lime-Shale	
1920 2370	Shale-Lime	
2370 3610	Lime-Shale	Ran 113 jts of 4 1/2" csg
3610 4798	Lime	62 jts 11.6# & 51 jts 10 1/2#
4798 4850	Sand	set @ 4850' Cemented
		w/250 sks 50/50 Posmix
		18% Salt - 3/4 of 1% CYR-2
		10# Gilsonite per sack
		PD @ 10:00 p.m.
		1-6-81

4850 - TD

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Well Log is true and correct to the best of my knowledge and belief and according to the records of this office.

GABBERT-JONES, INC.

James S. Sutton II
JAMES S. SUTTON II

Subscribed and sworn to before me this 15th day of January, 1981.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1983.

RECEIVED
STATE CORPORATION COMMISSION

JAN 28 1981

CONSERVATION DIVISION
Wichita, Kansas

01-28-1981

NOTARY PUBLIC

JAN 17 1981