


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

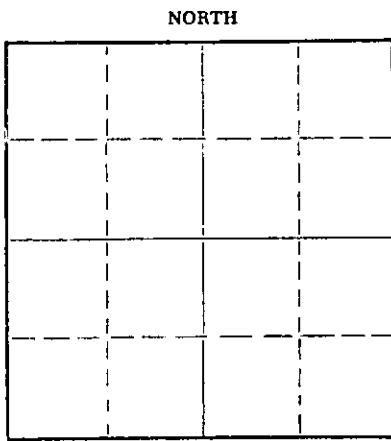

Locate well correctly on above
Section Plat

County. Sec. 11 Twp. 32S Rge. (E) 14 (W)
Location as "NE/CNW/SW" or footage from lines C SE NE
Lease Owner R. James Gear
Lease Name Lake Well No. 1
Office Address 1625 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 29, 1963
Application for plugging filed September 9, 1963
Application for plugging approved September 9, 1963
Plugging commenced September 9, 1963
Plugging completed September 9, 1963
Reason for abandonment of well or producing formation Non Productive

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4074 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 1015 | None |
| | | | | 5 1/2" | 4068 | 3242' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1015 feet of 8 5/8" surface pipe, cement circulated.
4068 feet of 5 1/2 inch long string, cemented with
100 sacks. Plugged back to 3920 feet. Top perforation
3891 feet. Bottom sanded to 3880 feet and cemented
with 5 sacks. Hole was filled with mud to 300 feet,
10 foot rock bridge, cemented with 10 sacks to base
of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 7 1964
1-7-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ralph Comstock Pipe Pulling, Inc., License No. 490
Address Stafford, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

R. James Gear (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

1015 Wichita Plaza
(Address)

SUBSCRIBED AND SWORN to before me this 6th day of January, 19 64

My commission expires August 30, 1965

Phyllis Gillen
Phyllis Gillen,

Notary Public.

DRILLER'S WELL LOG

OPERATOR: R. James Gear
1625 Wichita Plaza
Wichita, Kansas

WELL NAME: #1 LAKE
LOCATION: C SE NE, Sec. 11, 32S-14W
Barber County, Kansas

CONTRACTOR: **K & E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: 4-18-63

CASING RECORD: 8-5/8" @ 1015' w/450 sx.
5-1/2" @ 4068' w/100 sx.

COMPLETED: 4-29-63

ELEVATION:

ROTARY TOTAL DEPTH: 4074'

PRODUCTION:

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

| | |
|------------------|------|
| Sand & Red Bed | 40 |
| Red Bed | 360 |
| Shells & Red Bed | 820 |
| Red Bed | 1330 |
| Shale & Red Bed | 1440 |
| Lime & Shale | 1825 |
| Lime | 2630 |
| Lime & Shale | 3045 |
| Lime | 3465 |
| Shale & Lime | 3558 |
| Lime | 3775 |
| Shale & Sand | 3809 |
| Lime | 4074 |

RECEIVED
STATE CORPORATION COMMISSION

SEP 11 1963

9-11-63
CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, Wayne L. Brinegar, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Subscribed and sworn to before me this 2nd day of May, 19 63

Wayne L. Brinegar
Wayne L. Brinegar

My Commission expires August 30, 1965

Julene M. Bannon
(Julene M. Bannon) Notary Public.

