


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County. Sec. 18 Twp. 32S Rge. 14W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C SE SW

Lease Owner George A. Reed
Lease Name Stumph "A" Well No. 1
Office Address 645 Fourth Financial Center, Wichita, Ks 67202
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

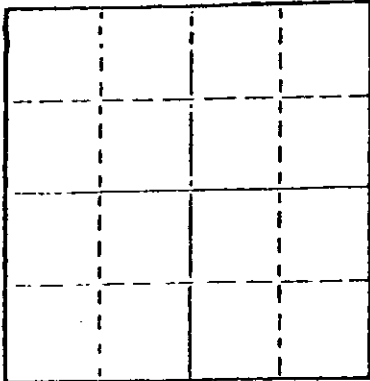

Locate well correctly on above
Section Plat

Date Well completed March 27 1978
Application for plugging filed March 27 1978
Application for plugging approved March 27 1978
Plugging commenced March 27 1978
Plugging completed March 27 1978
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5140
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	222'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 240 feet. Pumped 40 sacks of cement through drill pipe with pump truck. Pushed plug and 1/2 sack hulls to 40' and pumped 12 sacks of cement through drill pipe with pump truck to base of well collar. Plugged rat hole with 3 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
3-31-78
MAR 31 1978

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co., Inc. CONSERVATION DIVISION
910 Union Center, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
John C. Graves (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
910 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of March, 19 78

Betty Brandt
Betty Brandt Notary Public.

My commission expires May 9, 1979

CONTRACTOR: George A. Reed
645 Fourth Financial Center
Wichita, Kansas 67202

DRILLING COMMENCED: March 17, 1978

OPERATOR: Graves Drilling Co., Inc.
910 Union Center
Wichita, Kansas 67202

DRILLING COMPLETED March 27, 1978

CASING RECORD: 5 Jts. 222' 8 5/8 used
cemented with 220 sacks

LOCATION: Stumph "A" No. 1
C SE SW
Section 18-32S-14W
Barber County, Kansas

- 0 - 1004 Shale & Red Bed
- 90 - 222 Re Bed, Ream
- 1003 - 1188 Red Bed
- 1188 - 1675 Red Bed & Shale
- 1675 - 2546 Shale & Lime
- 2546 - 3280 Shale
- 3280 - 3634 Shale & Lime
- 3634 - 3780 Shale
- 3780 - 3949 Shale & Lime
- 3949 - 4078 Lime & Shale
- 4078 - 4567 Shale & Lime
- 4567 - 4664 Lime & Shale
- 4664 - 4858 Lime
- 4858 - 4975 Lime & Chert
- 4975 - 5053 Lime
- 5053 - 5120 Shale & Lime
- 5120 - 5140 Lime
- 5140 Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAR 31 1978
3-31-78
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John Graves
President

STATE OF KANSAS)
) ss.
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, this 30th day of March, 1978.

My commission expires:
May 9, 1979

Betty Brandt
Betty Brandt Notary Public