


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pawnee County, Sec. 33 Twp. 21 Rge. 16 (E) (W)
Location as "NE/CNW&SWK" or footage from lines SE/SW/NE
Lease Owner Thunderbird Drilling Co.
Lease Name Stroble Well No. #1
Office Address Box 501, Hays, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed Yes 19____
Application for plugging approved Yes 19____
Plugging commenced _____ 9-20 19 58
Plugging completed _____ 9-27 19 58
Reason for abandonment of well or producing formation _____



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3846' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | | |
| | | | | 5 1/2" | | 2,092' |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into T.D. 3846'.
Plugging started 9-20-58. Finished 9-27-58.
Plugged off bottom and put in 30 ft sand. Dumped 5 sacks cement.
Worked and shot pipe. Circulated and spotted oil. Worked and shot pipe. Circulated and spotted oil. Shot 5 1/2" casing at 2,092'.
Pulled pipe out of hole. Squeezed well with 10 sacks mud and 85 sacks cement. Well completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes
Box 221, Great Bend, Kan (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of September, 1958

My commission expires November 8, 1960

RECEIVED
STATE CORPORATION COMMISSION
Notary Public

PLUGGING
FILE SEC. 33 T. 21 R. 16W
BOOK PAGE 134 LINE 26

OCT 8 1958
CONSERVATION DIVISION

STROBLE #1

LOCATION: SE SW NB - Sec. 29,
Twp. 21.S, Rge. 16.W
Pawnee County, Kansas

CONTRACTOR: Thunderbird Drilling, Inc.
712 Union Center
Wichita, Kansas

SURFACE CASING: 8 3/8" set at 990' with 400 sacks
concent, 23 gal on 200 sacks, 1 1/2 gal
on 200 sacks, and 4 sacks Calcium
Chloride.

OIL STRING: 5 1/2" set at 3004' with 60 sacks
of concent, 23 gal.

ELEVATION: 1907' N. D.
1994' D. V.
1902' G. L.

COMMENCED: December 5, 1958

COMPLETED: December 16, 1958

WELL LOG


| | | | |
|------|---|------|--------------------|
| 0 | - | 110 | Sand |
| 110 | - | 360 | Shale |
| 360 | - | 480 | Red Dod |
| 480 | - | 626 | Sand |
| 626 | - | 682 | Red Dod |
| 682 | - | 1018 | Anhydrite |
| 1018 | - | 1950 | Shale & Shells |
| 1950 | - | 2215 | Lime |
| 2215 | - | 2520 | Lime & Shale |
| 2520 | - | 2678 | Shale & Shells |
| 2678 | - | 3005 | Shale & Lime |
| 3005 | - | 3010 | Shale |
| 3010 | - | 3105 | Shale & Lime |
| 3105 | - | 3400 | Lime |
| 3400 | - | 3405 | Shale |
| 3405 | - | 3510 | Shale & Lime |
| 3510 | - | 3810 | Lime |
| 3810 | - | 3835 | Shale & Lime |
| 3835 | | | Rotary Total Depth |

The undersigned, Charles W. Atkins, Jr., an officer of Thunderbird Drilling, Inc., hereby certifies that the above is a true and correct log of the formations encountered in the drilling of the #1 Stroble as shown in the daily drilling reports.

THUNDERBIRD DRILLING, INC.


Charles W. Atkins, Jr., Pres.

Subscribed and sworn to before me
this 10th day of December, 1958

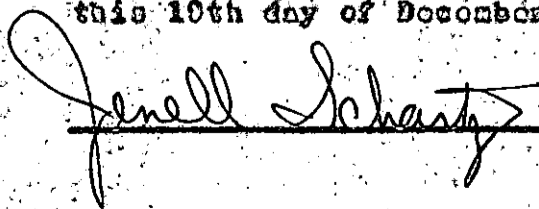
Jenell Schartz

JENELL SCHARTZ, Notary Public
My Commission Expires Sept. 5, 1960

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING OCT 8 1958
FILE SEC. 33T 21R 16W
BOOK PAGE 134 LINE 26
OIL CONSERVATION DIVISION
Wichita, Kansas