

15-135-20084-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

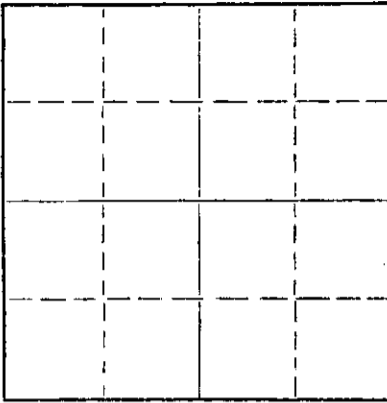

Locate well correctly on above
Section Plat

Ness County. Sec. 18 Twp. 18S Rge. 21W (E) W (W)
Location as "NE/CNW&SW" or footage from lines 175' SW of C SE SW
Lease Owner Texokan Petroleum Corporation, Inc.
Lease Name Wunder Well No. 1
Office Address P. O. Box 191, McPherson, Kansas 67160
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 29, 1967
Application for plugging filed November 29, 1967
Application for plugging approved 19
Plugging commenced November 30, 1967
Plugging completed November 30, 1967
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1260 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	282'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud, 100 sacks cement at 660', plug at 10' with 25 sacks cement, solid bridge and 10 sacks cement to surface.

DEC 5 1967
12-5-67
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS, COUNTY OF RICE
F. A. Wuellner Contractor ss.
(employee of owner, or owner or operator) of the above-described well; being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. A. Wuellner
F. A. Wuellner
P. O. Box 129, Sterling, Kansas 67579
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of December, 19 67

BERNARD LAUDERMILK, Notary Public

My commission expires Commission Expires January 22, 1970

Notary Public.

15.135-20084 000

STERLING DRILLING COMPANY
Sterling, Kansas 67579

WELL LOG ----- WUNDER #1

LOCATED: 175' SW of C SE SW, Section 18-18S-21S, Ness County, Kansas

OWNER: Texokan Petroleum Corporation, Inc.
ROTARY DRILLING CONTRACTOR: Group Exploration Company

COMMENCED: November 19, 1967
COMPLETED: November 29, 1967

ROTARY TOTAL DEPTH: 4260'

LOG

0 - 290	Shale and Lime
290 - 380	Sand
380 - 505	Shale and Lime
505 - 1135	Shale and Sand
1135 - 1500	Anhydrite
1500 - 2555	Shale and Lime
2555 - 2930	Lime
2930 - 3640	Lime and Shale
3640 - 3915	Lime
3915 - 4210	Lime and Shale
4210 - 4228	Lime
4228 - 4246	Chert - Mississippi Lime
4246 - 4260	Chert and Lime

CASING RECORD

Ran 7 joints 8 5/8" new 20# surface casing (282.30') Set at 290' K.B. with 175 sacks 70-30 Pozmix. Plug down at 11:00, 11-19-67, by Sun Cementing Company. Cement Circ.

Plugged and Abandoned

RECEIVED
STATE COMMISSIONER OF MINES
DEC 5 1967
GENERAL INVESTIGATION DIVISION
STATE OF KANSAS