

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-163-03417-00-01
Spot: N2N2SW Sec/Twnshp/Rge: 32-8S-19W
2310 feet from S Section Line, 3960 feet from E Section Line
Lease Name: ROSTOCIL Well #: 1
County: ROOKS Total Vertical Depth: 3509 feet

Operator License No.: 31171
Op Name: CONTINENTAL OPERATING CO.
Address: 1221 MCKINNEY STE 3700
HOUSTON, TX 77010

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3509	2400	from 1st plugging
SURF	8.625	193		160 sx

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/14/2013 9:00 AM
Plug Co. License No.: 32128 Plug Co. Name: ROME CORPORATION DBA WESTERN WELL SERVICE
Proposal Rcvd. from: RALPH BRUNGARDT Company: CONTINENTAL OPERATING CO. Phone: _____

Proposed
Plugging
Method:

Got to bottom and twisted off drill pipe and 3 collars. Left 37 jts. tubing and 3 drill collars in hole. Got to 3307' with bit.

Plugging Proposal Received By: CASE MORRIS Witness Type: PARTIAL
Date/Time Plugging Completed: 06/21/2013 2:30 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Perfs:

06/14 Ran tubing to 2000' and pumped 400 sx 60/40 4% gel cement. Didn't circulate. Pumped 500 more sx cement w/500# hulls. Didn't circulate.
06/17 Tagged cmt @1200'.
06/17 Ran tubing to 1200' and pumped 350 sx cmt w/500# hulls. Didn't circulate.
06/21 Tagged cmt @ 750'. Pumped 145 sx cmt w/400# hulls. Cement circulated.

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 31 2013

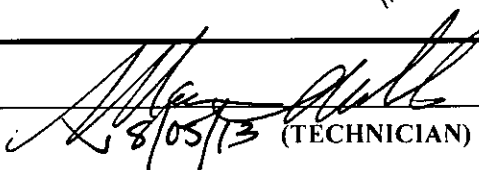
CONSERVATION DIVISION
WICHITA, KS

Remarks:

Plugged through: TBG

District: 04

Signed


8/05/13 (TECHNICIAN)

CM

JUL 22 2013