

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-203-20221-00-00
Spot: SWNENWNE Sec/Twnshp/Rge: 10-16S-35W
420 feet from N Section Line, 1760 feet from E Section Line
Lease Name: KEN BAKER A Well #: 10-1
County: WICHITA Total Vertical Depth: 4800 feet

Operator License No.: 3293
Op Name: RUSSELL OIL, INC.
Address: PO BOX 8050
EDMOND, OK 73083

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	314		WITH 215 SX CMT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/19/2013 3:00 PM
Plug Co. License No.: 33793 Plug Co. Name: H2 DRILLING LLC
Proposal Rcvd. from: GARY AWTELL Company: H2 DRILLING LLC Phone: (316) 636-2090

Proposed Plugging Method: 1ST PLUG AT 2490' WITH 50 SX CMT. 2ND PLUG AT 1560' WITH 80 SX CMT. 3RD PLUG AT 780' WITH 50 SX CMT. 4TH PLUG AT 330' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Plugging Proposal Received By: KENNY SULLIVAN WitnessType: NONE
Date/Time Plugging Completed: 07/19/2013 5:00 PM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

Perfs:

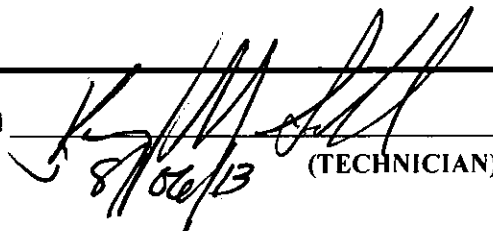
1ST PLUG AT 2490' WITH 50 SX CMT. 2ND PLUG AT 1560' WITH 80 SX CMT. 3RD PLUG AT 780' WITH 50 SX CMT. 4TH PLUG AT 330' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY CONSOLIDATED.

Plugged through: DP

District: 01

Signed


(TECHNICIAN)

RECEIVED
JUL 26 2013
KCC DODGE CITY

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 30 2013

CONSERVATION DIVISION
WICHITA, KS

Handwritten initials