

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20581-00-00
Spot: W2W2SW Sec/Twnshp/Rge: 1-18S-43W
1313 feet from S Section Line, 4903 feet from E Section Line
Lease Name: BLACKBIRD Well #: 1-1
County: GREELEY Total Vertical Depth: 5252 feet

Operator License No.: 5030
Op Name: VESS OIL CORPORATION
Address: 1700 WATERFRONT PKWY BLDG 500
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
DVT		1968		WITH 350 SX CMT
PROD	4.5	5252	0	WITH 550 SX CMT
SURF	8.625	547		WITH 275 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/19/2013 10:00 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: JOE RUPP Company: VESS OIL Phone: (785) 798-5151

Proposed Plugging Method: CIBP @ 5100' WITH 2 SX CMT OR 30 SX CMT & 100# HULLS. FILL 5 1/2" WITH CMT FROM 2000' TO 0'. ATTEMPT TO PUMP INTO ANNULUS WITH CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: NONE
Date/Time Plugging Completed: 07/23/2013 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

LEFT IN HOLE: 2 JOINTS 2 7/8" TBG, SEATING NIPPLE, MUD ANCHOR & BOTTOM HOLE PUMP. PUMP 30 SX CMT & 100# HULLS AT 5095'. PUMP 30 SX CMT AT 2695'. PUMP 185 SX CMT FROM 2005' TO 0'. TOP OFF WITH 2 YDS REDIMIX ON 7/23/13. ANNULUS HAS CMT TO SURFACE. CANNOT PUMP INTO.

Perfs:

Top	Bot	Thru	Comments
5130	5132		

RECEIVED
KANSAS CORPORATION COMMISSION

AUG 01 2013

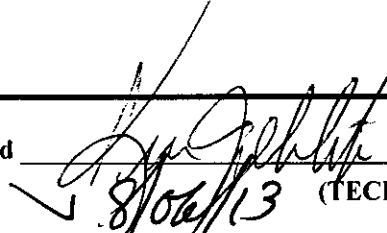
CONSERVATION DIVISION
WICHITA, KS

Remarks: **COMPLIANCE ISSUE: DENIED TA 10 YR RULE** USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

Signed


8/02/13 (TECHNICIAN)

RECEIVED

JUL 29 2013

KCC DODGE CITY

AM