

15-007-01607-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County. Sec. 13 Twp. 32S Rge. 15 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NE NE
Lease Owner National Cooperative Refinery Association
Lease Name Stumph-Smith "E" Well No. 1
Office Address 305 Rule Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole-Never Produced
Date well completed November 21, 1957
Application for plugging filed December 27, 1957
Application for plugging approved December 30, 1957
Plugging commenced February 12, 1958
Plugging completed February 13, 1958
Reason for abandonment of well or producing formation Unable To Complete as a producer.

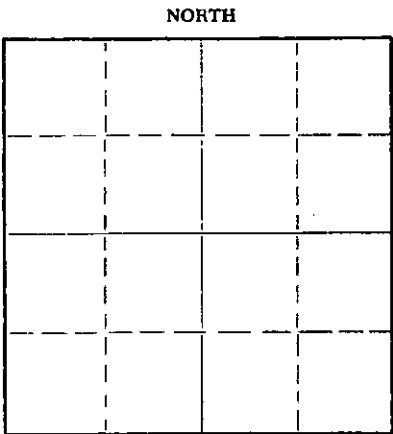

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well L. A. Laekamp, Jr.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4818 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	232'	None-Cemented
				5 1/2"	4818'	4078.44'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Recovered 4078.44' of 5-1/2" casing. Bailed hole to 300'. Set top of rock bridge at 300'. Mixed and dumped 20 sacks of cement to 275'. Filled hole with mud from 275' to 35'. Set a 5' rock bridge to 30'. Mixed and put in 10 sacks of cement, filled to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

FEB 26 1958
2-26-58
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Ace Pipe Pulling Company
Address Box 304, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. R. Sears (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. R. Sears (C. R. Sears)
305 Rule Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of February, 1958

My commission expires November 26, 1960.
Nell McComb Notary Public.

PLUGGING
FILE SEC. 13 T. 32 R. 15W
BOOK PAGE 72 LINE 28

