

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Rush County. Sec. 21 Twp. 18 Rge. 21 (E) (W) X

Location as "NE/CNW%SW%" or footage from lines NW NW SE

Lease Owner R. W. Shields

Lease Name Pabst Well No. 1

Office Address 666 Fourth National Bank Building Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 7-29-64 19

Application for plugging approved 7-30-64 19

Plugging commenced 8-1-64 19


Plugging completed 8-5-64 19

Reason for abandonment of well or producing formation

Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

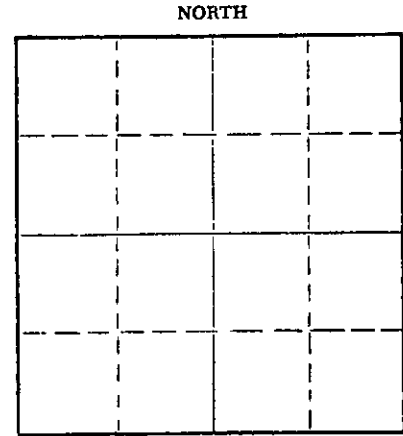

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4129 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5.8	1001	None
				5 1.2	None	2017

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Rigged up. Cleaned out cellar.

Rigged up jacks. Measured T. D. Sanded to 4150'. Dumped 4 sacks of cement. Working pipe. Shot pipe at 2514' in cement.

Working pipe. Shot pipe at 2000'. Circulating mud. Spotted 40 sacks of cement.

Dumped 40 sacks of cement. Capped well with 10 sacks. Well completed.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 12 1964

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11 day of August, 19 64

(Signature) [Signature]

Notary Public.

My commission expires May 27, 1965

15-135-00559-0000

DRILLERS' LOG

Well Owner: R. W. Shields  
Farm Name: Pabst "B" Well No; 1  
Commenced: 8/30/58  
Completed: 9/26/58  
Total Depth: 4172'  
Casing: 8 5/8" @ 1019' cemented w/500 SACKS  
5 1/2" @ 4171' cemented w/125 SACKS

NW NW SE  
Sec. 24-18S-21W  
Ness County, Kansas  
Elevation:  
Production:

Contractor: Peel Brothers, Inc.

Figures below indicate bottoms of formations:

Surface clay	0 -	95
Shale		214
Sand		235
Shale and shells		480
Sand		510
Shale and shells		564
Red bed		620
Shale and shells		670
Sand		690
Shale and shells		720
Sand		750
Shale and shells		865
Shale, shells and sand		965
Red bed		1035
Red bed and shale		1305
Anhydrite		1340
Shale		2250
Shale and lime		2360
Shale		2410
Lime		2425
Shale and lime		3110
Shale		3210
Shale and lime		3630
Lime		3960
Lime and shale		4044
Lime		4080
Sand and shale		4124
Lime		4172
Total Depth		4172

This is to certify that the above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.

BY Jack Matter, Jr.

SUBSCRIBED AND SWORN to before me this 29th day of September, 1958

My commission expires: April 27, 1960

Litch Brank  
Notary Public

RECEIVED  
STATE CORPORATION COMMISSION

AUG 12 1964

CONSERVATION DIVISION  
Wichita, Kansas