


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
111 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

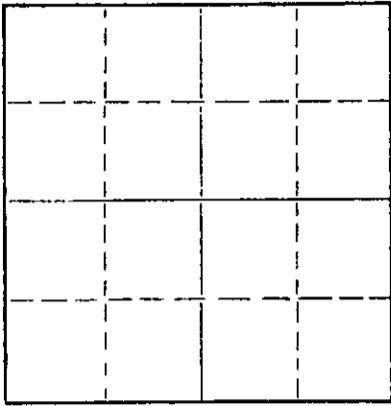

Locate well correctly on above
Section Plat

HARPER County, Sec. 28 Twp. 33S Rge. 6 ~~QX~~ W (W)
Location as "NE/CNWxSWx" or footage from lines C-SE, NW
Lease Owner NORBLA OIL COMPANY
Lease Name MATTIMORE Well No. 1
Office Address 509 PHILTOWER BLDG., TULSA, OKLAHOMA
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed AUGUST 19, 19 61
Application for plugging filed AUGUST 18, 19 61
Application for plugging approved AUGUST 18, 19 61
Plugging commenced AUGUST 18, 19 61
Plugging completed AUGUST 19, 19 61
Reason for abandonment of well or producing formation No productible zone.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4980 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	257'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Gunned up pits forming heavy mud, filled hole up to 240' with heavy mud, pushed wooden plug & 1/4 sx. hulls to 240', capped with 15 sx. cement through drill pipe.
Filled hole up to 40', pushed wooden plug & 1/4 sx. hulls to 40', filled hole up to base of well cellar with 10 sx. cement.

RECEIVED
STATE CORPORATION COMMISSION

SEP 17 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GARVEY DRILLING COMPANY
Address ROUTE #2, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
VERNE A. MORRIS (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Verne A. Morris
Route #2, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of September, 1961

My commission expires November 12, 1962

Brandenburg
Notary Public

WELL LOG

COMPANY NORBLA OIL COMPANY

SEC. 28 T. 33S R. 6W

FARM MATTIMORE NO. 1

LOC. C-SE,NW


TOTAL DEPTH 4980'

COUNTY HARPER CO., KANSAS

COMM. July 27, 1961 COMP. August 19, 1961

CONTRACTOR GARVEY DRILLING COMPANY

CASING 8-5/8" @ 257' w/175 sax.



ELEVATION 1307' GL

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

257	Surface soil & red bed
490	Red rock
680	Shale
1100	Shale & shells
1980	Lime & shale
3015	Shale & lime
3385	Lime & shale
3855	Shale & lime
4055	Lime
4170	Lime & shale
4514	Shale & lime
4562	Lime & shale
4605	Shale & lime
4654	Lime, chert & shale
4831	Lime & shale
4868	Cherty lime & shale
4911	Lime & shale
4935	Shale & lime
4973	Simpson sand
4980	Lime, shale, chert & hard sand.
4980	T. D.

RECEIVED
STATE CORPORATION COMMISSION
SEP 11 1961
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS }
County of BARTON } ss

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state the above and foregoing is a true and correct copy of the log of the #1 MATTIMORE well.

Verne A. Morris

Subscribed and sworn to before me this 22nd day of August 19 61

My Commission Expires: November 12, 1962

Grandbury
NOTARY PUBLIC