

TO: .
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-20671-00-02
Spot: SWNE Sec/Twnshp/Rge: 22-31S-35W
1979 feet from N Section Line, 1981 feet from E Section Line
Lease Name: CSMU Well #: 105
County: STEVENS Total Vertical Depth: 6200 feet

Operator License No.: 33127
Op Name: CHAPARRAL ENERGY, L.L.C.
Address: 701 CEDAR LK BLVD
OKLAHOMA CITY, OK 73114

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5934		WITH 15 SX CMT
PROD 7		6179		WITH 475 SX CMT
SURF	10.75	1784		WITH 975 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/30/2013 11:00 AM
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.
Proposal Rcvd. from: RONNIE ORR Company: ORR ENTERPRISES, INC. Phone: (580) 251-9618

Proposed Plugging Method: SET CIBP @ 5934' WITH 2 SX CMT. PERFORATE @ 1814' WITH 90 SX CMT. PERFORATE @ 500' & CIRCULATE CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/03/2013 9:30 AM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

8/30/13: SET CIBP @ 5934' WITH 15 SX CMT. PERFORATE @ 1814' WITH 90 SX CMT. PERFORATE @ 500'. SDON 9/3/13: TAG TOC @ 1558'. PUMP 211 SX CMT THROUGH PERFS & 500'. CMT CIRCULATED TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5984	6004		

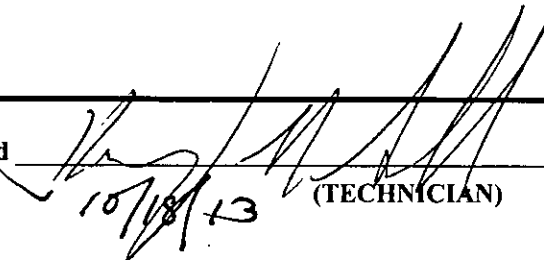
RECEIVED
KANSAS CORPORATION COMMISSION

Remarks: USED COMMON CEMENT BY ORR ENTERPRISES.

Plugged through: TBG

District: 01

Signed


10/18/13 (TECHNICIAN)

RECEIVED

SEP - 5 2013

KCC DODGE CITY

SEP 10 2013
CONSERVATION DIVISION
WICHITA, KS

