


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barber County. Sec. 15 Twp. 32 Rge. 13 (E) 13 (W)

Location as "NE/CNW/SW" or footage from lines C NW NW
Lease Owner Aylward Drilling Company
Lease Name Lenkner Well No. 1
Office Address 813 1st National Bank Bldg. - Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 30 19 63
Application for plugging filed March 29 19 63
Application for plugging approved March 30 19 63
Plugging commenced March 30 19 63
Plugging completed March 30 19 63
Reason for abandonment of well or producing formation _____

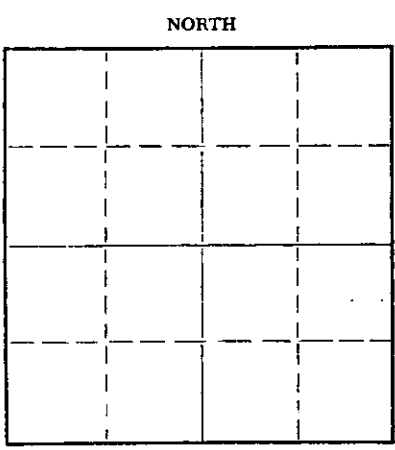

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4515 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	208	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 180 feet. Plug set at 180 with 20 sacks cement and 1/4 sack hulls through the drill pipe. Heavy mud to 40 feet. Plug at 40 feet with 10 sacks dry cement and 1/4 sack hulls. Bridged rathole and plugged with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

APR 25 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Aylward Drilling Company
Address _____

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Paul W. Hesse (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul W. Hesse
813 1st Nat'l Bank Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of April, 19 63

My commission expires December 11, 1963
Duane Jessup Notary Public.

LENKNER #1

Casing Record:
8 5/8" - 208'

Company: Aylward Drilling Company
and Kenneth Rupp
Contractor: Aylward Drilling Company

Location: C NW NW
Sec. 15-32-13W
Barber County
Kansas

Commenced: March 14, 1963
Completed: March 30, 1963

Elev. 1733 D.F. - 1736 R.B.

	<u>From</u>	<u>To</u>	<u>Remarks</u>	
Red Bed	0	190	Set 8 5/8" surface pipe @ 208' w/250 sacks cement.	
Red Rock	190	208		
Red Rock & Shale	208	760	Geological Tops: (Log)	
Red Rock	760	1010		
Shale	1010	1230		
Shale & Shells	1230	1900		Elgin Zone 3606
Shale & Lime	1900	1955		Heebner 3767
Lime & Shale	1955	2330		Douglas 3806
Lime	2330	2405		Douglas Sandstone 3920
Shale & Lime	2405	2550		Lansing-Kansas City 3944
Lime & Shale	2550	2675		Base Kansas City 4359
Shale & Lime Streaks	2675	2835		Marmaton 4369
Shale	2835	3090		Massy Zone 4406
Shale & Lime	3090	3370		Mississippi 4450
Lime & Shale	3370	3420		
Shale	3420	3940		
Lime	3940	4515 T.D.		DST 3896-3940 Open 70" Rec. 310' Muddy Water IBHP 1492#/30" - FBHP 1425#/30" LFP 156# - FFP 234#

RECEIVED
STATE CORPORATION COMMISSION

APR 25 1963

CONSERVATION DIVISION
Wichita, Kansas

DST 4410-40 Open 70"
Rec. 30' Mud
IBHP 67#/30" - FBHP 22#/30"
LFP 22# - FFP 22#

DST 4449-69 Open 1 hr. 10"
Rec. 65' Mud
IBHP 67#/30" - FBHP 89#/30"
LFP 44# - FFP 44#

D & A

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

Charles D. Williams

Subscribed and sworn to before me this 12th day of April, 1963

Duane Jessup
DUANE JESSUP Notary Public

My commission expires December 11, 1965