

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County, Sec. 26 Twp. 32S Rge. 15 E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines  
N/2 NW NE

Lease Owner Raymond Oil Company, Inc.  
Lease Name Cline "A" Well No. 2

Office Address One Main Place, Suite 900, Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole)


Dry Hole

Date Well completed February 13, 1981  
Application for plugging filed February 13, 1981  
Application for plugging approved February 13, 1981  
Plugging commenced February 13, 1981  
Plugging completed February 13, 1981  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. V. Leslie  
Producing formation Depth to top Bottom Total Depth of Well 3593'  
Show depth and thickness of all water, oil and gas formations.

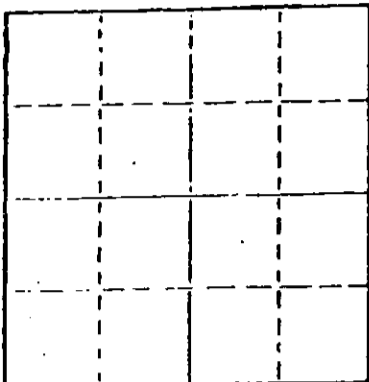

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	252'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 40 sacks 50-50 posmix through drill pipe to 500'. Pumped 40 sacks 50-50 posmix thorough drill pipe to 250'. Pushed plug & hulls to bridge @ 40' & 10 sacks cement. Plugged rat hole with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

RECEIVED  
FEB 24 1981  
CONSERVATION DIVISION  
Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Betty Brandt (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Betty Brandt  
910 Union Center, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1981

Rebecca L. Matthews  
Notary Public.

My commission expires May 17, 1983



ROTARY DRILLERS' LOG

OPERATOR: Raymond Oil Company, Inc. DRILLING COMMENCED: February 6, 1981  
 One Main Place, Suite 900  
 Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: February 13, 1981  
 910 Union Center  
 Wichita, Kansas 67202

CASING RECORD: 6 Jts. 252' of new 8-5/8" LOCATION: Cline "A" No. 2  
 cemented with 215 sacks. N/2 NW NE  
 Section 26-32S-15W  
 Barber County, Kansas

-----

0 - 108 Red bed  
 108 - 130 Gyp  
 130 - 252 Red bed  
 252 - 704 Red bed & shale  
 704 - 1235 Cement  
 1235 - 1653 Lime & shale  
 1653 - 3310 Shale & lime  
 3310 - 3418 Lime & shale  
 3418 - 3593 Shale & lime  
 3593 Rotary Total Depth

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

Copy sent to:  
 State Corporation Commission  
 Kansas Geological Society  
 Kansas Geological Survey

GRAVES DRILLING CO., INC.

By Betty Beaudt  
 Secretary-Treasurer

STATE COMMISSION

STATE OF KANSAS )  
 ) ss:  
 SEDGWICK COUNTY )

FEB 24 1981  
 2-24-81  
 CONSERVATION DIVISION  
 Wichita, Kansas

Subscribed and sworn to before me, a Notary Public, this 23rd day of February, 1981.

Rebecca L. Matthews  
 Rebecca L. Matthews Notary Public

My commission expires:  
 May 17, 1983.