

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-15-20127-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Marion County. Sec. 29 Twp. 17 Rge. 4 E/4
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
NE SE NW

Lease Owner Slusser Drilling Company
Lease Name George Deines Well No. 2
Office Address Box 275, Marion, Ks 66861
Character of Well (Completed as Oil, Gas or Dry Hole)
Oil

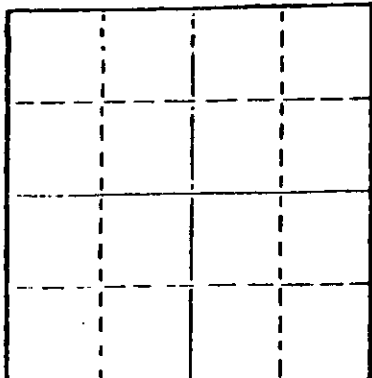

Locate well correctly on above
Section Plot

Date Well completed July 17 1970
Application for plugging filed October 25, 1976 1976
Application for plugging approved October 26, 1976 1976
Plugging commenced October 25 1976
Plugging completed November 5 1976
Reason for abandonment of well or producing formation
depleted

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Hugh E. Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2446
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	152	none
				5 1/2"	2393	2148.53'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Move in, rig up and dig out cellar. Filled with gravel to 2385' and added
5 sacks of cement to plug bottom. Set a 10' rock bridge at 180' to 170' and
added 25 sacks of cement. Set a 10' bridge at 40' to 30' and added 10 sacks
of cement to plug to surface.

RECEIVED
STATE CORPORATION COMMISSION

NOV 09 1976

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor THE BUCKEYE CORPORATION


STATE OF KANSAS COUNTY OF BUTLER, ss.
Charles V. Cross (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) *Charles V. Cross*
Box 1020, El Dorado, Kansas 67042
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 1976

Isa L. Fisher
Notary Public.

My commission expires



DRILLERS LOG

Company	Slusser Drilling Company
Contractor	Slusser Drilling Company
Farm	George Deines #2
8 5/8	@ 152
5 1/2	@ 2393

Commenced 7/14/70
Completed 7/17/70
N8 S8 NW 29-17-4
Marion County, Kansas

Surface soil	5
Shale and shells	100
Lime and shale	525
Shale and lime	645
Shale and shells	1175
Shells and shale	1250
Shale and lime	1830
Lime	2185
Lime and shale	2389
Chat	2393 Rotary T.D.

RECEIVED
STATE CORPORATE COMMISSION

OCT 26 1976

CONSERVATION DIVISION
Wichita, Kansas

Chat Sharp	2393 - 2415	Show Gas
Chat Hard	2415 - 2421	Increase Gas - Show Oil
Chat Hard	2421 - 2423	
Chat Soft	2423 - 2428	Increase Oil & Water
Chat Hard	2428 - 2441	
Chat & Lime	2441 - 2446	T. D.