

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 17 Twp. 32S Rge. 13 (E)/(W)

Location as "NE/CNW%SW%" or footage from lines NE SW SW

Lease Owner Raymond Oil Company, Inc.

Lease Name MILLS Well No. 1

Office Address 410 Fourth National Bank Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed November 9 19 61

Application for plugging filed 19

Application for plugging approved 19 61


Plugging commenced 12/26 19 61

Plugging completed 12/28 19 61

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production No production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

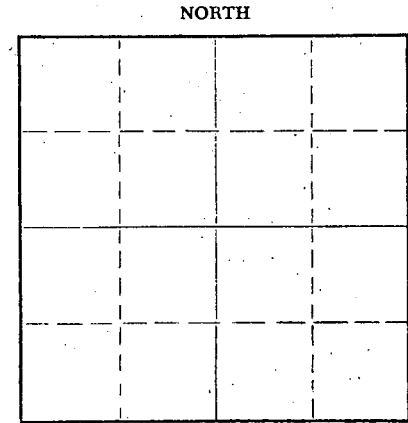

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Hample

Producing formation Depth to top Bottom Total Depth of Well 4520 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	955'	
				5-1/2"	4513'	3300'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back with gravel and dumped 6 sacks of cement. Shot pipe off at 3327'. Pulled pipe and mudded hole to 300'. Finished filling hole with ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
JAN 11 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self

Address R R #1 - Hutchinson, Kansas

STATE OF Kansas COUNTY OF Reno, ss.

Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self

R. R. #4, Hutchinson, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of Dec, 19 61

My commission expires October 18, 1965

Notary Public.



Raymond Oil Company, Inc. #1 MILLS
 NE SW SW Sec. 17-32S-13W
 Barber County, Kansas

ELEVATION: 1805' DF
 1808' KB

Contractor: Company Tools - Rig #3
 Commenced: October 23, 1961
 Completed: November 9, 1961

Casing Record:
 8 5/8" @ 955'
 5 1/2" @ 4513'
 RTD 4520'

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Shale and Red Bed, Sand and Shells	577
Sand, shale and Shells	955
Red Bed and Shale	1679
Anhydrite	1706
Shale and Shells	1915
Lime and Shale	2175
Lime	2295
Lime and Shale	2500
Lime	2655
Shale and Lime	3430
Lime	3545
Lime and Shale	3820
Lime	3936
Shale with Lime and Sand	4009
Lime	4365
Lime and Shale	4448
Lime	4450
Lime with Shale	4520

TOPS:

Heebner	3822
Douglas	3866
Lansing-Kansas City	4009
Base Kansas City	4411
Marmaton	4421
Massey Zone	4449
Mississippi Lime	4508
Rotary Total Depth	4520

RECEIVED
 STATE CORPORATION COMMISSION

NOV 29 1961

CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

I hereby certify that the above is true and correct to the best of my knowledge.

Wm. M. Raymond
 Wm. M. Raymond, President
 RAYMOND OIL COMPANY, INC.

Subscribed and sworn to before me this 16th day of November, 1961.

Bernice Balst
 Notary Public

My commission expires
 December 10, 1962