


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

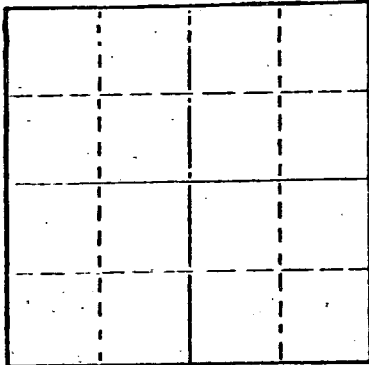

Locate well correctly on above
Section Plat

Harper County, Sec. 20 Twp. 33S Rge. 6W (E) (W)
Location as "NE/CNW/SW" or footage from lines C-NE NW
Lease Owner Anadarko Production Company
Lease Name Truby "A" Well No. 1
Office Address P.O. Box 351 Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed April 29, 1976
Application for plugging filed verbal application 1976
Application for plugging approved verbal approval 1976
Plugging commenced April 29 1976
Plugging completed April 29 1976
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G.R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,500 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	329'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Filled hole with heavy rotary mud from 4,500 feet (rotary total depth) to 360 feet. Set plug at 360 feet and cemented with 50 sxs cement. Filled hole with heavy rotary mud from 360 feet to 40 feet. Set solid plug at 40 feet and cemented with 15 sxs cement, 5 sxs cement in rat hole.
Plugging operations accomplished utilizing Halliburton cementing pump truck through 4 1/2" drill pipe.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Halliburton Services
Address 410 Union Center Building Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.
Dean Britting - Agent (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main Wichita, Kansas 67202 (Address)

Subscribed and Sworn to before me this 6th day of May, 1976



Elsie Willison Notary Public

My commission expires June 30, 1978

RECEIVED
STATE CORPORATION COMMISSION

MAY 07 1976

CONSERVATION DIVISION
Wichita, Kansas

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Anadarko Production Company**

SEC. **20** T. **33S** R. **6W**
 LOC. **C-NE NW**


FARM **Truby "A"** NO. **1**

TOTAL DEPTH **4,500'**
 COMM. **April 12, 1976**
 SHOT OR TREATED
 CONTRACTOR **H-30, INC.**
 ISSUED **May 6, 1976**

COMP. **April 30, 1976**

COUNTY **Harper**

KANSAS



CASING

20	10		
15	8	5/8" 329' cemented w/300 sxs cement	ELEVATION 1,326' GR
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Clay, Red Bed and Shale	14'
Sand	330'
Red Bed	365'
Shale	580'
Shale and Lime	1,345'
Shale	1,515'
Lime	1,538'
Shale w/lime streaks	1,735'
Shale and Lime	2,012'
Lime and Shale	2,945'
Lime	3,055'
Lime and Shale	4,500'
Rotary Total Depth	4,500'


I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 6th day of May,



Elsie Williamson
Elsie Williamson-Notary Public

My Commission Expires:
June 30, 1978

RECEIVED
 STATE CORPORATION COMMISSION

MAY 07 1976

CONSERVATION DIVISION
 Wichita, Kansas