

15:35-30211-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ness County. Sec. 27 Twp. 18S Rge. (E) 21W(W)
Location as "NE/CNW/SW" or footage from lines C SE NW
Lease Owner Pickrell Drilling Company
Lease Name Pfaff "H" No. 2 Well No.
Office Address 705 4th Natl Bank Bldg, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 8, 19 65
Application for plugging filed January 8, 19 65
Application for plugging approved January 8, 19 65
Plugging commenced January 8, 19 65
Plugging completed January 8, 19 65
Reason for abandonment of well or producing formation Dry Hole

NORTH

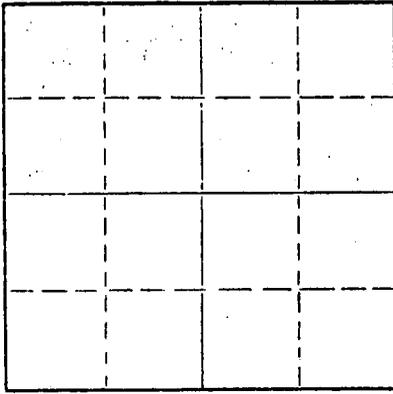

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 4230 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	306'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 540 feet, set plug, cemented with 20 sacks. Heavy mud to 270', set plug, cemented with 20 sacks cement. Heavy mud to 40 feet, set plug, cemented with 10 sacks cement to bottom of cellar. Plugged rat hole with 2 sacks cement.

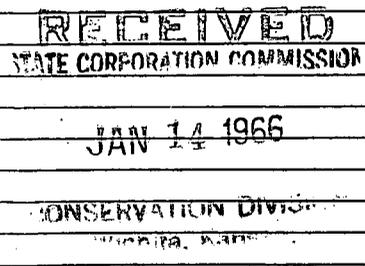


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 4th Natl Bank Bldg, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. SEBITS (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebits
705 4th Natl Bank Bldg, Wichita, Kansas (Address)
Subscribed and sworn to before me this 11th day of January, 19 66
Maxine Blackman
My commission expires June 21, 1966 Notary Public.

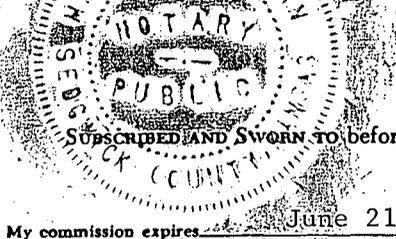

ROTARY DRILLING LOG

15135 36211 0000

COMPANY: PICKRELL DRILLING COMPANY
705 4th National Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 12-29-65

Rotary Drilling Completed 1-7-66

LOCATION: PFAFF "H" No. 2, C SE NW Section 27-18-21W, Ness County, Kansas

CONTRACTOR: PICKRELL DRILLING COMPANY
Wichita, Kansas

CASING RECORD: (13 jts) 8 5/8" surface casing set at 306', CEMENTED WITH 185 sacks cement. Circulated. Completed 5:15 P.M. December 29, 1965. No oil string run, D & A

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

70	Clay & Sand	
250	Shale	C. F. S. 4109
265	Sand & Shale	4115
307	Shale	4128
530	Shale & Shells & Sand	4148
775	Red Beds & Shale	4160
980	Sand	4175
1337	Shale & Shells	4190
1370	Anhydrite	4203
1400	Red Beds	4215
1800	Shale & Shells	4230
2150	Shale	
2360	Lime & Shale	
2670	Lime	Slope Tests 2500
3225	Shale & Lime	3000
3363	Shale	3500
3640	Lime & Shale	4000
3790	Lime	
3854	Lime & Shale	
4115	Lime	S. L. M. 3526
4160	Shale, Lime & Sand	3871
4193	Mississippian	4172
4230	RTD	

RECEIVED

JAN 14 1966

CONSERVATION DIVISION

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By C. W. SEBITS, Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.

On this 14th day of January, 1966 before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires June 21, 1966

Maxine Blackman
Maxine Blackman, Notary Public