


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15/35 0056/0000

WELL PLUGGING RECORD

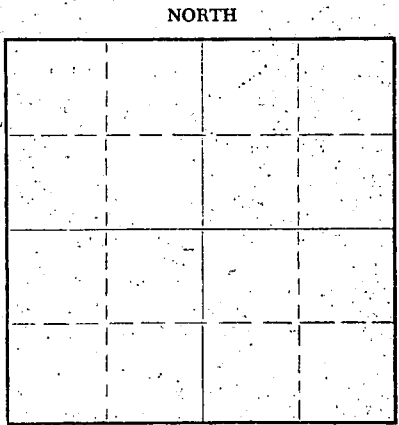

Locate well correctly on above Section Plat

Ness County. Sec. 25 Twp. 18 Rge. (E) 21 (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner R. W. Shields
Lease Name Ryersee Well No. "C" # 1
Office Address 308 Rule Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed yes 19____
Application for plugging approved yes 19____
Plugging commenced 4-3-61 19____
Plugging completed 4-11-61 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. P. Leiker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4190' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		3,314'

RECEIVED
STATE CORPORATION COMMISSION

APR 13 1961

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed. _____ feet to _____ feet for each plug set.

Plugging commenced 4-3-61. Plugging completed 4-11-61.
Measured in to total depth at 4190'.
Plugged off bottom: Sanded back to 4060' and dumped
4 sacks of cement.
Worked and shot casing at 3800' - 3700' - 3620'. Circulated
and spotted 75 barrels of oil. Shot 5 1/2" casing free at
3314'. Built rack and slide. Pulled and layed down casing.
Plugged well: Squeezed the well with 80 barrels of mud and
80 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Company
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of April, 19 61

Kayann Jenkins
Notary Public.

My commission expires December 8th, 1963.



COMPANY: R. W. Shields
Rule Building
Wichita, Kansas

15 135 00561-000

Rotary Drilling Commenced: 10-25-60
Rotary Drilling Completed: 11-8-60

LOCATION: Ryerse "C" No. 1
NW NW SW Sec. 25-18S-21W
Ness County, Kansas

CONTRACTOR: Shelley-Miller Drilling Company
205 Miller Building
Wichita, Kansas

CASING RECORD: 8 5/8" 28# casing set @ 281' cemented with 150 sacks
5 1/2" 138 jts J-55 set @ 4184' cemented with 400 sacks

L O G

(Measurements from top of Rotary Bushing to bottom of formation)

Shale & Shells	520
Red Bed	(35)
Sand	965
Red Bed & Shale	1,190
Shale & Shells	1,298
Anhydrite	1,336
Shale & Shells	2,140
Shale & Lime	2,415
Lime	2,590
Shale & Lime	2,710
Lime	2,835
Shale & Lime	2,920
Lime & Shale	3,030
Lime	4,185 Rotary T.D.

RECEIVED
STATE CONSERVATION COMMISSION
MAR 23 1966
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, Richard A. Shelley, Partner of Shelley-Miller Drilling Company, hereby certifies in behalf of said company, that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

SHELLEY-MILLER DRILLING COMPANY

By Richard A. Shelley

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS

BE IT REMEMBERED, that on this 10th day of November, 1960, before me, the undersigned, a Notary Public, duly commissioned in and for the county and state aforesaid, came Richard A. Shelley, Partner, and known to me to be the same person who executed the foregoing instrument of writing in behalf of Shelley-Miller Drilling Company, as a Partner of said company, and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

Leann M. Powers
Notary Public

My Commission Expires: March 24, 1964