

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

BARBER County. Sec. 18 Twp. 32S Rge. (E) 15 (W)

Location as "NE/CNW/SW" or footage from lines SW - SW - NE

Lease Owner ATLANTIC RICHFIELD COMPANY

Lease Name T. L. WELSH "D" Well No. 2

Office Address Box 521, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) S.W.D.W.

Date well completed 5-1- 19.61

Application for plugging filed 8-18- 19.75

Application for plugging approved 8-20- 19.75


Plugging commenced 8-20- 19.75

Plugging completed 8-23- 19.75

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production S.W.D.W. 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

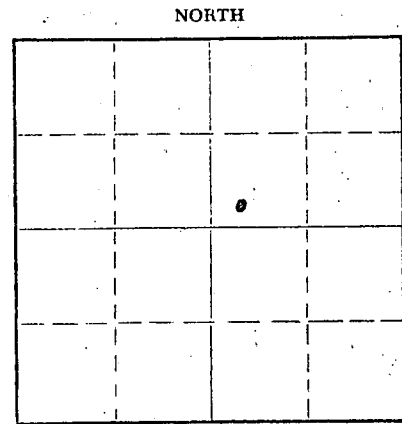

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Russel Biberstein

Producing formation S.W.D.W. Depth to top 4760 Bottom 4790 Total Depth of Well 4840 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	320	10 3/4	320	NONE
		0	4840	5 1/2	4840	3919

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped in 35 sks cement, plug through perf 4760-4790, top plug at 4385, shot csg off at 4100, 4000 & 3919. Filled hole w/mud pulled 128 jts total 3919 spotted 50 sks cement plug from 250 up to 350, filled hole w/mud up to 15' set 15 sks cement, plug from 15' up to surface, welded plate on top of 10 3/4 complete P & A 8-23-75 at 5:00 PM.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 05 1975  
9-5-75  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LILLARD CASING PULLING

Address Box 962, Woodward, Oklahoma

STATE OF OKLAHOMA, COUNTY OF WOODWARD, ss.

Doyle Cheatwood (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Doyle Cheatwood*  
ATLANTIC RICHFIELD COMPANY  
1112 11th, Woodward, Oklahoma  
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of September, 1975

My Commission Expires 2-28-79

DONNA HALE

Notary Public.

My commission expires

15-007-19081-0000

T. L. WELSH "D" NO. 2

NE/4 of Section 18-32S-15W  
Barber County, Kansas  
Sinclair Oil & Gas Company

10-3/4" O. D. casing cemented at 320'  
5-1/2" O. D. casing cemented at 4840'

Drilling commenced 4-15-61  
Drilling completed 5-2-61

FROM	TO	FORMATION	REMARKS
0'	35'	Clay	
35	375	Red rock & shale	10-3/4" O. D. casing cemented with 275 sacks at 320'
375	740	Red bed	
740	1550	Red bed & shale	
1550	2060	Shale & lime	
2060	2500	Lime	
2500	2890	Lime & shale	
2890	3474	Shale & lime	
3474	4015	Lime & shale	
4015	4077	Lime	
4077	4190	Sand, lime & shale	
4190	4215	Shale	
4215	4840	Lime	5-1/2" O. D. casing cemented with 200 sacks at 4840'
T. D.	4840'		

This is a true copy of the driller's log as shown on the drilling tickets.

BARBOUR DRILLING COMPANY

By: *E. W. Dribel*

Subscribed and sworn to before me on this 5th day of May, 1961

*Merry Jane Burt*  
Notary Public

My commission expires July 27, 1961

RECEIVED  
STATE CORPORATION COMMISSION

AUG 19 1975  
8-19-75  
CONSERVATION DIVISION  
Wichita, Kansas