

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Barber SEC. 34 TWP. 32 RGE. 15 E/W
Location as in quarters or footage from lines:
1390' FNL, 2230' FWL

	34		*

Locate Well
correctly on above
Section Platt.

Lease Owner Vincent Oil Corporation
Lease Name DeGeer Well No. 1
Office Address 125 N. Market, #1110, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed 7-3-83
Application for plugging filed 7-3-83
Plugging commenced 7-3-83
Plugging completed 7-3-83
Reason for abandonment of well or producing formation Dry Hole
when drilled.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dodge City Office

Producing formation -0- Depth to top -0- bottom -0- T.D. 5150

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from feet
to feet for each plug set. Plugged with 140 sxs 60/40 poz, 2% gel,
3% cc as follows: 60 sxs @ 960', 50 sxs @ 420', 10 sxs @ 40'
solid bridge plug, 10 sxs rat hole, 10 sxs mousehole. No water
well drilled.

STATE CORPORATION COMMISSION

JUL 21 1983

7-21-83

CONSERVATION DIVISION
Wichita Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Wheatstate Oilfield Services, Inc. Rig 2

STATE OF Kansas COUNTY OF Sedgwick, ss.

RICHARD A. HIEBSCH (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.


(Signature) Richard A. Diebel

1110 KSB Bldg., 125 N. Market
(Address) Wichita, Ks. 67202


SUBSCRIBED AND SWORN TO before me this 21st day of July, 19 83.

Ruth N. Benjamin
Notary Public.

My Commission expires: June 17, 1985



15-007-21624-0000

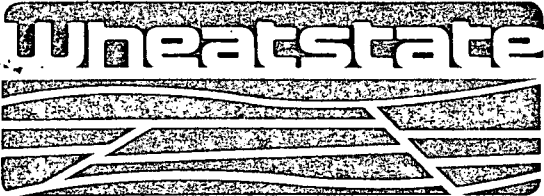

Oilfield Services, Inc.

- Rotary Drilling
- Drilling Mud and Chemicals
- Heavy Oil Field Hauling
- Roustabout and Dirt Services
- Well Completion and Servicing Units

DRILLERS' WELL LOG

STATE OF KANSAS

DeGeer # 1
 NW/4 Sec. 34-32-15
 Barber County, Kansas
 Commenced : June 21, 1983
 Completed : July 3, 1983
 Operator : Vincent Oil Corporation

JUL 21 1983
7-21-83
 CONSERVATION DIVISION
 Wichita, Kansas

Depth	Formation	Remarks
From To		Jr. Rathole set 20', 16" conductor, cemented with 2 yards 10 sx grout.
-0- 1250	Surface sand, red bed, shale	Spudded @9:30 with rotary 6-21-83. Drilled to 1250'. Set 9 joints (366') new 24# 8 5/8" surface casing @381', cemented with 100 sxs 60/40 poz, 3% CC, 100 sxs Common, 3% CC. Plug down @4:15 A.M. 6-22-83. Cement by Sun.
1250 2073	Shale	
2073 5150	Lime & Shale	
		R.T.D. 5150'.
		Plugged well with 140 sxs 60/40 poz, 2% gel, 3% CC. Plug down @10:30 A.M. 7-3-83. Job by Sun, tkt. #14091. State plugger called, Steve Durant..
		Plugged as follows: 60 sxs @960', 50 sxs @420', 10 sxs @40' with solid bridge, 10 sxs in rathole and 10 sxs in mousehole.

STATE OF KANSAS)
) ss
 COUNTY OF PRATT)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Log is true and correct to the best of my knowledge and belief and according to the records of this office.

WHEATSTATE OILFIELD SERVICES, INC.

L. R. Belding
 L. R. BELDING, VICE-PRESIDENT

Darlene Butts
 Darlene Butts, Notary Public
 Pratt, Kansas 67124 • Telephone (316) 672-7514

My Commission Expires:
 April 23, 1987
 P.O. Box 329 • N. Highway 281 at Airport