


DISTRICT CONSERVATION AGENT'S REPORT

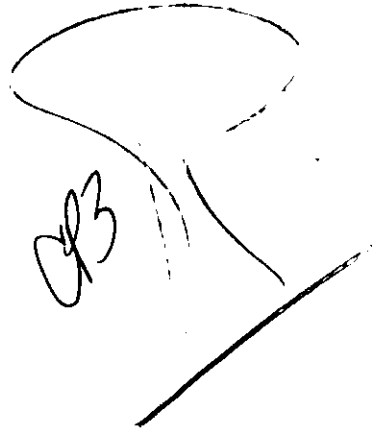

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. \_\_\_\_\_

LOCATION SE-SE-SE

SEC. 19 TWP. 31 RGE. 14-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Oldfather-"A"

Operator Anderson-Pritchard Oil Corp Address Box #142 - G. Bend, Kans.

Field \_\_\_\_\_ County Barber

Total Depth 4525 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 13 3/8 - 3000ft - Circulated with cement  
9 1/2 - 972ft - Circulated with cement - 5 1/2 casing  
Set at 4525ft - Cemented with 300 sacks of cement.  
Plugged back to 3800ft. with Lane Wells Plugs &  
Chat - Pumped 6 sacks of cement at 3800ft - Shot off  
& pulled the 5 1/2 casing - Mud to 300ft - Set Rock  
Bridges & 20 sacks of cement at 300ft - Mud to  
30ft - Bridges & 10 sacks of cement at the surface.

**PLUGGING**  
FILE SEC 19 TWP 31 R 14W  
BOOK PAGE 26 LINE 29

DEC 4 - 1950  
12-1-50  
CONSERVATION DIVISION  
Wichita, Kansas  
John Stouck  
District Conservation Agent

Date 12-1-50