


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

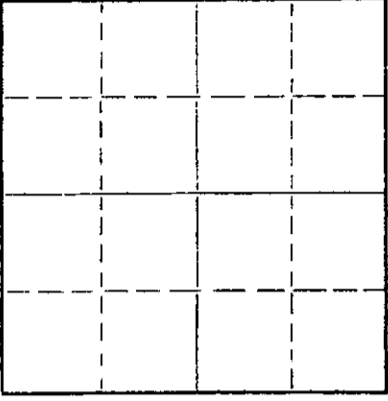

Locate well correctly on above
Section Plat

Ness County. Sec. 13 Twp. 20S Rge. (E) 22 (W)
Location as "NE/CNWxSWx" or footage from lines C NE SE
Lease Owner Raymond Oil Company, Inc.
Lease Name BELTZ Well No. 1
Office Address 410 Fourth National Bank Bldg., Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-23 1969
Application for plugging filed 3-23 1969
Application for plugging approved 3-23 1969
Plugging commenced 3-23 1969
Plugging completed 3-23 1969
Reason for abandonment of well or producing formation No oil or gas found in commercial quantities.
If a producing well is abandoned, date of last production -- 19--
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4395 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	572'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted 50 sacks 50-50 Pozmix with 6% gel at 720'. Pushed plug to 540' with 20 sacks same. Set solid bridge at 40' with 10 sacks. Plugging completed 3:30 AM 3-23-69.

RECEIVED
STATE CORPORATION COMMISSION
MAR 27 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rains & Williamson Oil Co., Inc.
Address 1425 Wichita Plaza - Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains Wilson Rains
1425 Wichita Plaza - Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 25 day of March, 1969

My commission expires 6-30-71
Sherry Gish Notary Public.

State

ROTARY DRILLING LOG

15-135-20234-0000

Operator: Raymond Oil Company, Inc.
BELTZ #1
C NE SE 13-20S-22W
Ness County, Kansas

Contractor: Rains & Williamson
Oil Co., Inc.
Commenced: 3-13-69
Completed: 3-23-69

Casing: 8-5/8"/572'/300 sx.
Pozmix 3% HA-5

Formations

Surface Clay	44'
Shale	840'
D. Sand	1055'
Shale	1085'
Red Bed	1407'
Anhydrite	1438'
Shale	2190'
Lime and Shale	2215'
Lime	2335'
Lime and Shale	2630'
Lime	2755'
Lime and Shale	3710'
Lime	4395'
Rotary Total Depth (D&A)	4395'

RECEIVED
STATE CORPORATION COMMISSION
MAR 27 1969
CONSERVATION DIVISION
Wichita, Kansas

We certify that the above log
is true and correct to the best
of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.

Wilson Rains

Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the State
of Kansas, County of Sedgwick, this 25th day of March, 1969.

Sherry Gish

Sherry Gish Notary Public

My Commission Expires:
6-30-71