

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Strike out upper line
when reporting plug-
ging off formations.

Barber County, Sec. 20 Twp. 30 Rge. 14W (E) (W)

NORTH

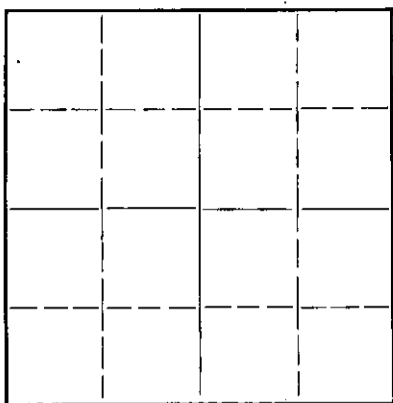

Locate well correctly on above
Section Plat

Location as "NE1/4NW1/4SW1/4" or footage from lines
Lease Owner Great Lakes Carbon Corporation
Lease Name Werner Well No. 1
Office Address Brown Building, Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 10-26-42 19
Plugging completed 11-7-42 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Alexander, Great Bend, Kan.
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4702' to 4521' Plugged back w/ cement.
4521' to 4350' Mud
4350' to 4330' Cement
4330' to 192' Mud
192' to 177' Cement 10 sax.
177' to 18' Mud
18' to 6' Cement 6 sax.
6' to surface, Mud.

PLUGGING
FILE SEC 20-T-30R14W
BOOK PAGE 59 LINE 41



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Great Lakes Carbon Corporation
Address Brown Building, Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. L. Steinberg & Company (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) C. L. STEINBERG & COMPANY
809 Petroleum Building,
Wichita, Kansas. (Address)

SUBSCRIBED AND SWORN to before me this 9th day of November, 1942.
My commission expires Dec. 6th, 1945.
Clytell Smalley Notary Public.

GREAT LAKES CARBON CORPORATION
No. 1 Werner

Sec. 20, Twp. 30S, Rge. 14W
Con SE SE

Total Depth 4702'

Potential: D & A

Comm. Date: July 25, 1942

Comp. Date: Oct. 5, 1942

Contractor: R. C. Patton Company

Casing Record:

10" 192
5 1/2" 4569

Geological Data

sand, shale & shells	190
shale & shells	750
Anhydrite	770
shale	920
salt	1200
shale	1315
shale & shells	1950
lime & shale	2195
lime	2235
shale & lime	2640
shale	2755
lime & shale	3180
lime	3820
shale & lime	4015
lime	4490
cherty lime	4520
lime	4530
sand	4594
lime	4630
shale	4645
lime	4665
shale & sand	4675
lime	4702 T.D.

Top	Ft. Riley	2300	
	Florence	2400	
	Topeka	3159	
	Lansing	3985	
	Conglomerate	4476	
	Viola	4495	
	Simpson	4572	Show of oil
	Arbuckle	4676	

20 30 14W
54 41

I hereby certify that this is a true and correct copy of the log as kept by the drillers on the above well.

W. J. Topping

Subscribed and sworn to before me, this 11th day of November
A.D. 1942.

3-31-43

Mercedes N. Parsons

My commission expires August 31 1946.