

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

CRB

FILE NO. _____

LOCATION SE. NW - SWSEC. 9 TWP. 31 RGE. 14WDry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

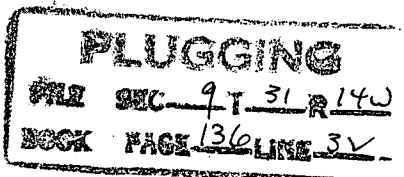
Well No. 3 Lease Wills MillsOperator J. M. Huber, Corp. Address Box #460 Pratt - Kans-Field _____ County BarberTotal Depth 4360 Feet.

(Describe briefly the manner in which the well was plugged)

Sucker Pipe 16" - 117 ft. Circulated with cement.
10 3/4" - 773 ft. Circulated with cement.
5 1/2" casing set at 4335 ft. - 125 sacks of cement. Plugged
back with rock to 4320 ft. - Pumped 13 sacks of cement
at 4320 ft. Shot off & hulled the 5 1/2" casing - mud to 275 ft.
Set Rock Bridge & 20 sacks of cement at 275 ft.
Mud to 35 ft. Bridge & 10 sacks of cement
at the surface

FILED
JAN - 9 1952
CONSERVATION DIVISION
WICHITA, KANSAS

District Conservation Agent

Date 1-7-52

X