

R

CB

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. \_\_\_\_\_

LOCATION SE-SE-NE

SEC. 3 TWP. 31 RGE. 14-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well X

I have today completed supervision of plugging of:

Well No. 1 Lease Goddin


Operator Harber Drilling Co Address Box 34 Wichita - Kansas

Field \_\_\_\_\_ County Boober

Total Depth 4424 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe left in hole 10 3/4 - 465 ft. - Pipe encased with Cement.  
7" casing set at 4415 ft & cemented - Plugged back from  
bottom to 4415 ft with rock & sand - Mixed 5 sacks Cement  
in 7" cas - y at 4415 ft. Shot off & recovered 3086 ft of 7" cas - y  
Filled with mud to 400 ft. Plug & 10 sacks cement.  
Surface Plug 20 ft below the surface & 10 sacks cement.  
Frank Carroll - Pipe Puller - Mud between Plugs

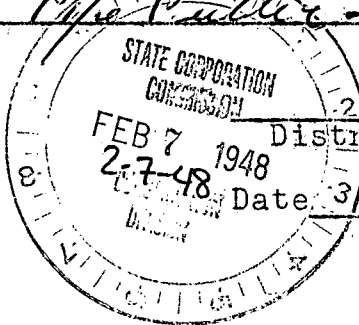

C. M. Stough  
District Conservation Agent  
Date 3-1-24-48

PLUGGING  
FILE SEC 3 T 31 R 14W  
BOOK PAGE 13 LINE 18