

15-007-01945-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
311 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 36 Twp. 32 Rge. 11 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE SW NE

Lease Owner Pan American Petroleum Corporation

Lease Name Vernon G. Coleman Well No. 1

Office Address Ellinwood, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 2-26 1957

Application for plugging filed 7-13 1965

Application for plugging approved 7-14 1965


Plugging commenced 8-9 1965

Plugging completed 8-9 1965

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production July 1965

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

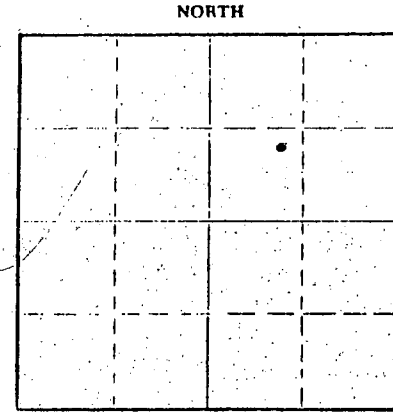

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving

Producing formation Mississippi Depth to top 4477 Bottom 4567 Total Depth of Well 4567 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Depleted	4477	4567	8-5/8"	257	None
				5-1/2"	4592	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mixed 11 sacks of gel mud and mudded pipe to 250'.  
Set 10' rock bridge, mixed and dumped 6 sacks of cement. Set 10' rock bridge, mudded hole to 40', set rock bridge to 30' and capped well with 4 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 18 1965  
8-18-65  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF SEWARD, ss.


I, D. M. Liles (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Box 432, Liberal, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of August, 1965

February 11, 1968

[Signature]  
Notary Public.





FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Surface Sand, Shale	-	267			
Shale, Shells	267	1275			
Anhydrite	1275	1340			
Shale	1340	1465			
Lime, Shale	1465	1630			
Lime	1630	2450			
Lime, Shale	2450	3780			
Lime	3780	3793			
Lime, Shale	3793	3805			
Lime	3805	4120			
Lime, Shale	4120	4175			
Lime	4175	4477			
Mississippi Top	4477				
Cherty Lime, Slight Oil Stains in Samples	4477	4525			
Cherty Lime	4525	4567			
Run Schlumberger Electric Log to F.D.					
Total Depth		4567			
By Schlumberger		4567			
By Rotary Drill		4567			
Well Completed 2-26-57					
Total Depth		4567			
Plugged Back Depth		4546			
Mississippi Formation					