

15-077-00139-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Harper County, Sec. 28 Twp. 32S Rge. 9 (E) W (W)

NORTH

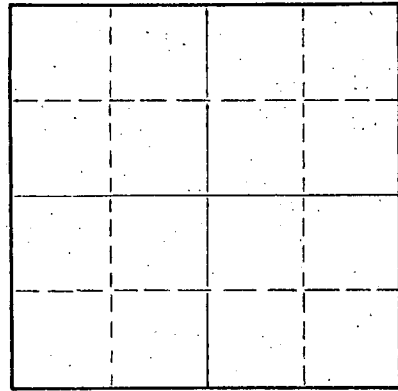

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Beardmore Drilling Company
Lease Name Blick Well No. 1
Office Address 603 Petroleum Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 8-9 1954
Application for plugging filed 8-9 1954
Application for plugging approved 8-9 1954
Plugging commenced 8-9 1954
Plugging completed 8-9 1954
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4829 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Red Rock & Shale		0	152'	8-5/8"	152'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 150' to 4829' - Heavy Mud
- 150' - Wood Plug
- 105' to 150' - 15 Sacks Cement
- 35' to 105' - Heavy Mud
- 35' - Wood Plug
- 0-35' - 5 Sacks Cement

RECEIVED
STATE CORPORATION COMMISSION
AUG 19 8-19-54
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Beardmore Drilling Company
Address 603 Petroleum Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Heber Beardmore (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Heber Beardmore
603 Petroleum Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of August, 19 54

January 28, 1956
Leonard P. Tolk
Notary Public.

My commission expires _____

PLUGGING
FILE SEC 28 T 32 R 9 W
BOOK PAGE 55 LINE 42

Drilled for: Beardmore & Whiteside
Drilled by: Beardmore Drilling Company

15-077-00139-0000

BLICK #1

NE NE NE
Section 28-32S-9W
Harper County, Kansas

Casing Record:

8-5/8" 152¹ W/100 Sacks Cement

Drilling Commenced: July 23, 1954
Drilling Completed: August 9, 1954

Elevation: 1473 D.F.

<u>FORMATION</u>	<u>DEPTH</u>
Cellar	5
Red Rock & Shale	152
Shale & Shells	900
Shale & Lime	1650
Lime & Shale	2095
Shale & Lime	2700
Lime & Shale	2820
Shale & Lime	3145
Lime & Shale	3585
Lime	3670
Lime & Shale	3745
Shale	3835
Shale & Lime	3980
Lime	4405
Lime & Shale	4450
Lime	4480
Lime & Chert	4511
Lime	4610
Lime & Shale	4775
Lime	4815
Sand	4829 T.D.

TOPS:

Kansas City	3944
Mississippi	4459
Simpson	4810

D.S.T.#1 3477-3491: Open 1 hr., shut in 15 min. Good Blow. Recovered 1790¹ salt water, B.H.P. 1360 I.F. 200 F.F. 920 Hydrostatic 2000.

D.S.T.#2 4462-4511: Failed--Tool Plugged.

D.S.T.#3 4812 -4819: Open 1 hr. Fair to good blow. Recovered 540¹ Muddy salt water. I.F. 60 FF 280 BHP 1960 Hydrostatic 2800¹

STATE OF KANSAS
COUNTY OF SEDGWICK ss

RECEIVED
STATE CORPORATION COMMISSION
8-19-54
AUG 19 1954

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the location above-described, to the best of my knowledge and belief.

Neil Beardmore

Subscribed and sworn to before me this 17th day of August, 1954.

Leonard P. Tolle
Notary Public

My Commission Expires:
January 28, 1956.

PLUGGING
SEC 28 T 32 R 9W
PAGE 56 LINE 42